LIVTAB

Creator Series

Installation Manual

Basic Safety Warnings

- This product is an electric height-adjustable desk and should be used only by adults or under adult supervision.
- Do not allow children to play on, climb on, or remain near the desk while it is in motion.
- Make sure there are no people or obstacles under or around the desk during height adjustment.
- Keep hands, feet, and loose objects away from the lifting columns, crossbeams, and all other moving parts during operation.

Weight Capacity and Structural Safety

- Do not exceed the maximum dynamic or static load specified for this product.
- Dynamic load refers to the maximum weight the desk can support while in motion.
- Static load refers to the maximum weight the desk can support while stationary.
- Distribute heavy items as evenly as possible across the center area of the desktop.
- If a multi-monitor mount is installed, make sure it is securely fastened before use.
- Do not place any load on the desk until installation is complete and all structural fasteners are fully tightened.
- Do not sit on the desktop or place your body weight on the edge of the desk.

Electrical Safety

- Use only the original power supply provided with the product.
- Do not use the desk outdoors or in damp environments.
- If the power cord is damaged, stop using the desk immediately and contact customer support.
- The USB ports are intended only for charging electronic devices.
- Do not disassemble the control system or motor modules.

Installation Safety

- This product is equipped with an anti-collision system, but this feature does not replace active supervision.
- Always keep the desk within sight while it is in motion.
- Make sure there are no hard objects, such as chair armrests or cabinets, under the desk during operation.

- After unpacking the product, confirm that all parts are included. If anything is missing, please contact customer support at **support@livtab.com.**
- Scan the QR code to view the installation video: **livtab.com/product-guide.**

Table of Contents

Please confirm your desk configuration before starting assembly.

01

Main Desk Installation (CR-1) ---------- 01-07

02


L-Shaped and Extended L-Shaped
Desk Installation (CR-L / CR-L2) ---------- 08-27

03


U-Shaped Desk Installation (CR-U) ---------- 28-42

Desk Configuration Preview


The Creator Series supports multiple layouts. Please choose the assembly method that matches your specific configuration.

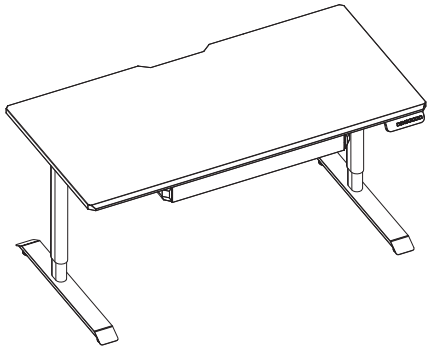


Main Desk

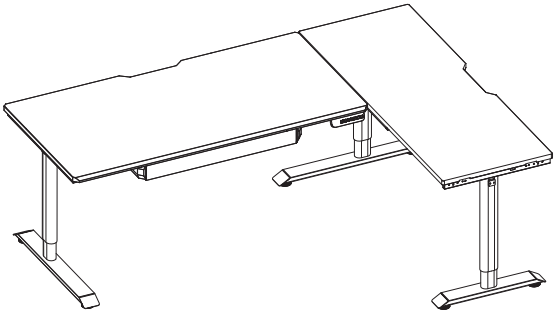


L-Shaped Desk (Right-Hand)

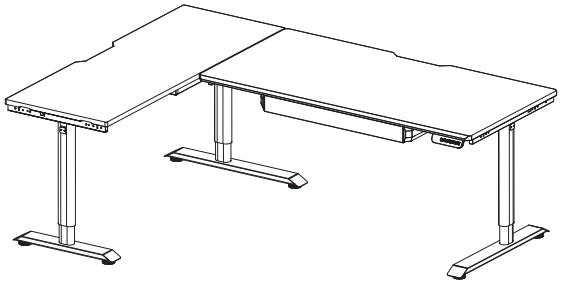


L-Shaped Desk (Left-Hand)

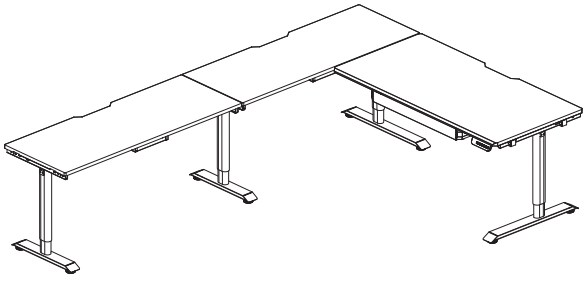

Extended L-Shaped Desk (Left-Hand)

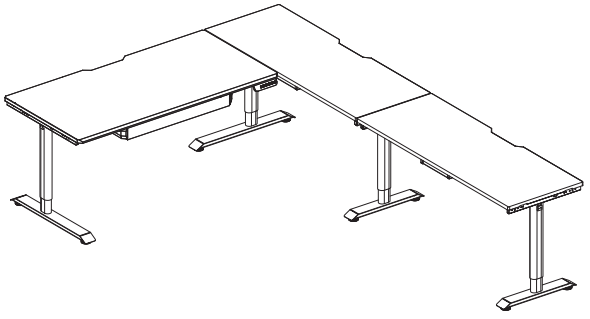

Extended L-Shaped Desk (Right-Hand)

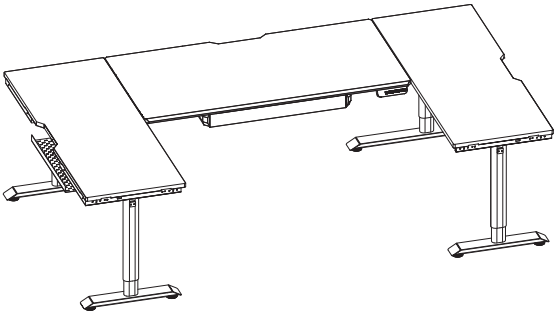


U-Shaped Desk


Step-by-Step Assembly: Main Desk

❶ Package Overview

Main Desk



Main Desktop x1




Main Legs x1




Master Controller
（N2）x1


❷ Unpack the Main Desktop

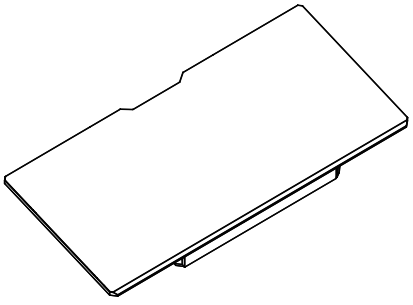


Main Desktop x1

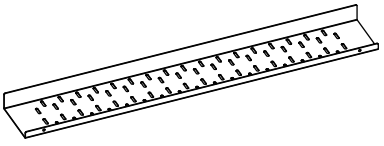

Cable Management Tray x1



Tray Brackets x2



Control Panel x1



Allen Key
(4 mm) x1



Phillips Self-tapping
Screw x1




Phillips
Screwdriver x1



Cable Management
Clips x10


❸ Install the Main Desktop

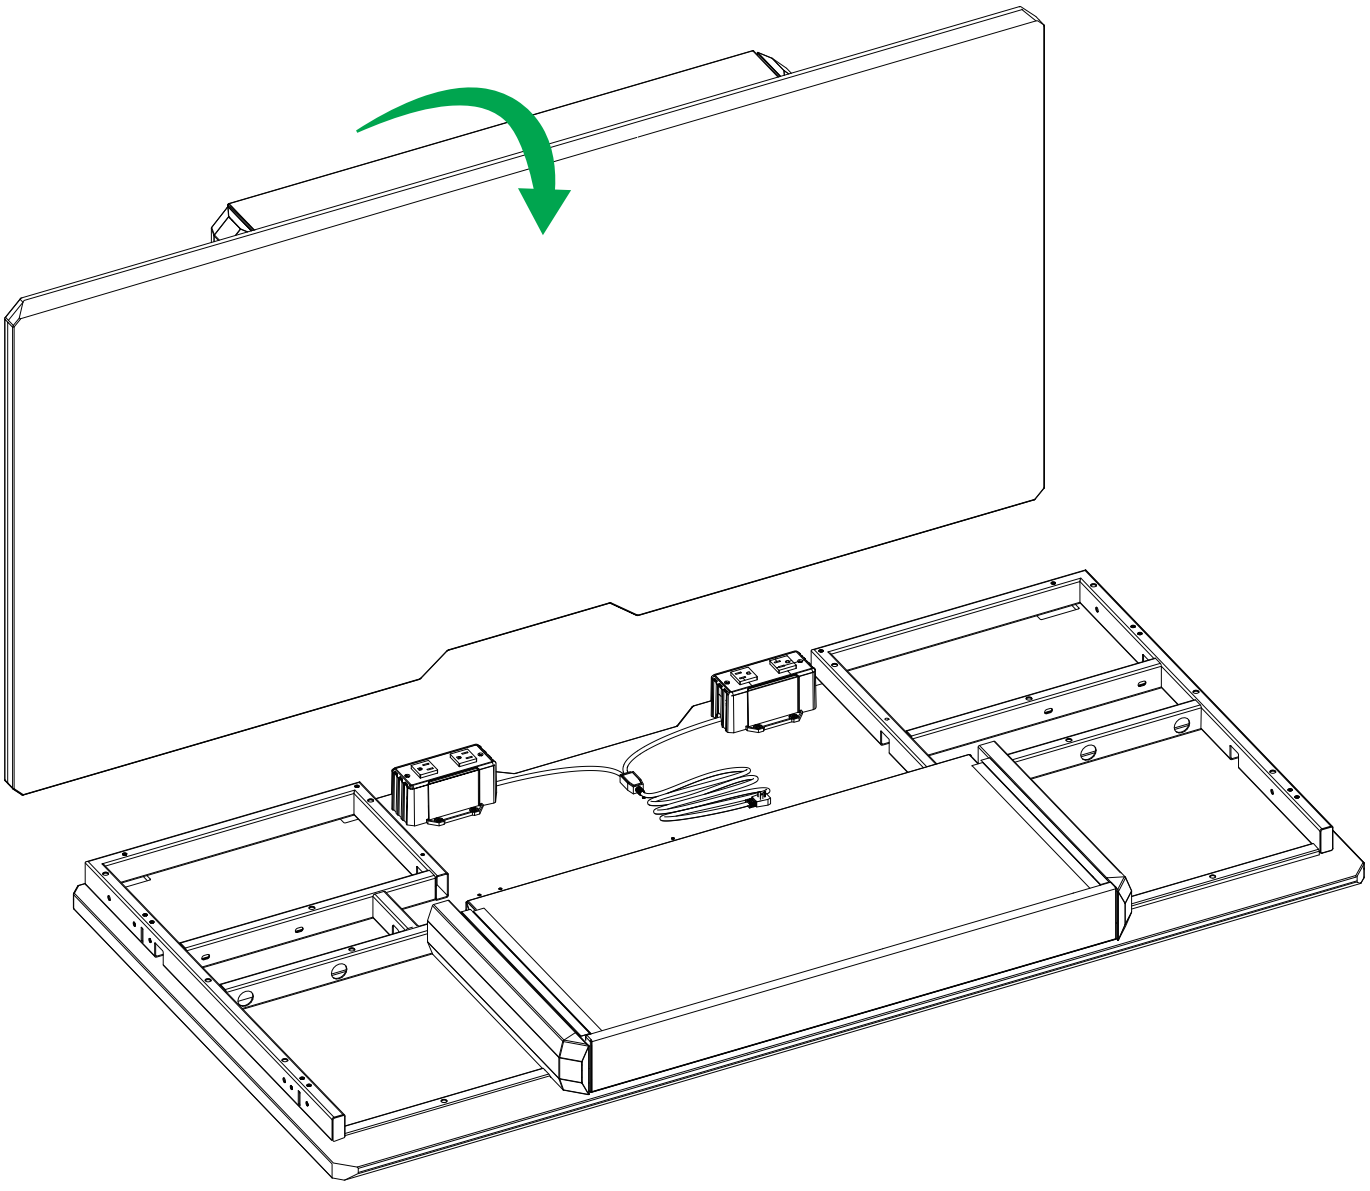




At least two people are required to flip the desktop and place it upside down on a clean, flat surface. To avoid scratches, place the foam and protective packaging underneath the desktop during assembly.


4 Unpack the Master Controller

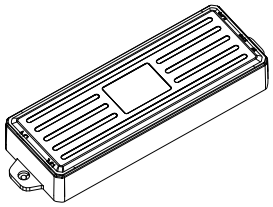

Master Controller
（N2）x1




Allen Key
（4 mm）x1



M6/16 mm x3





Leg Connection Cable
140 cm（55"）x1




Power Cable x1

5 Install the Master Controller

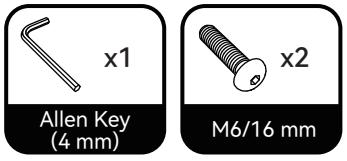

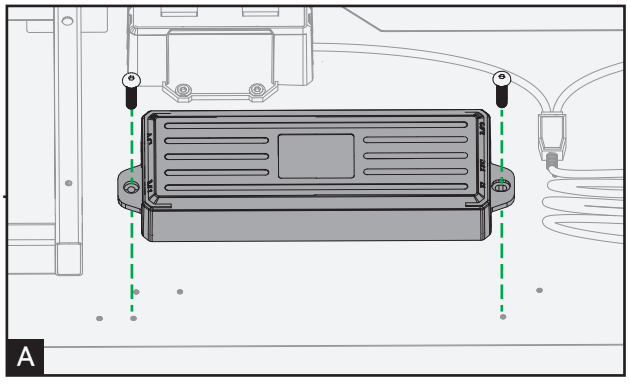




Power Port

Note: Ensure the Master Controller power port is facing to the right.


This is a spare cable.
Keep it for future use.


6 Install the Cable Management Tray and Control Panel

Note: Do not overtighten the screws.

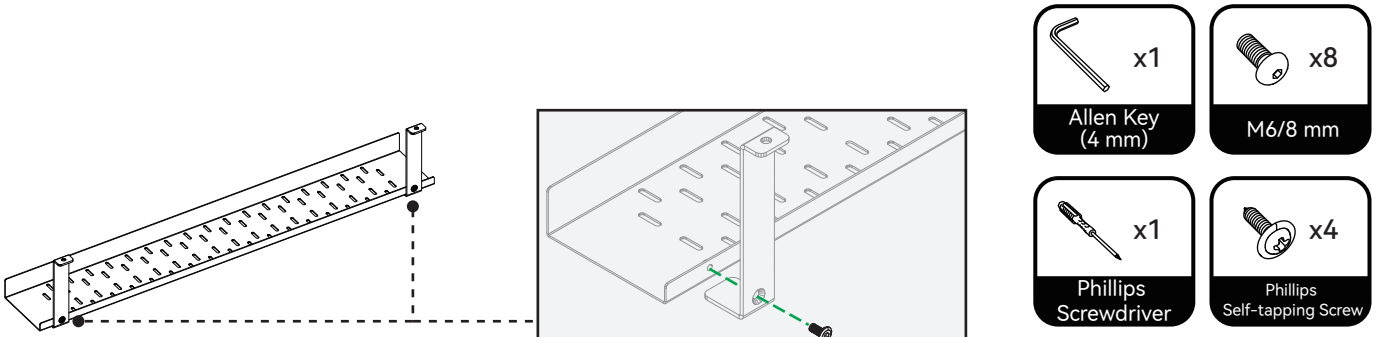


M6/8 mm

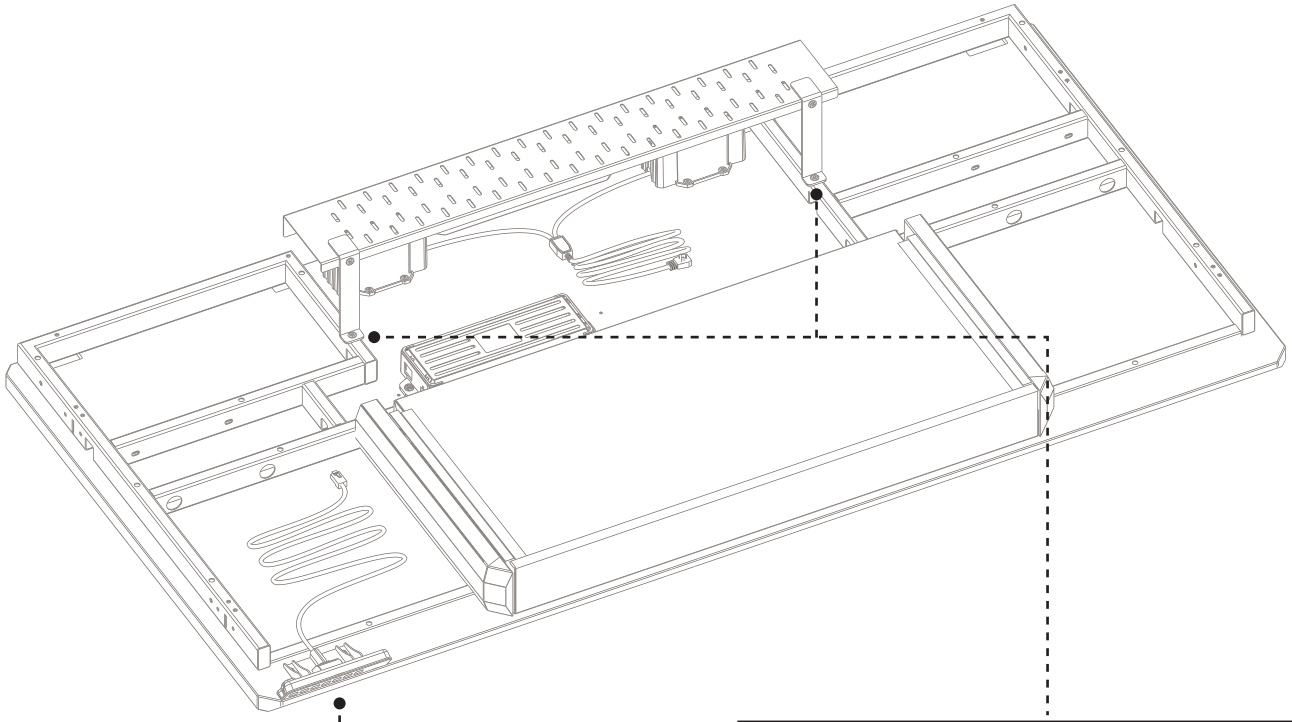

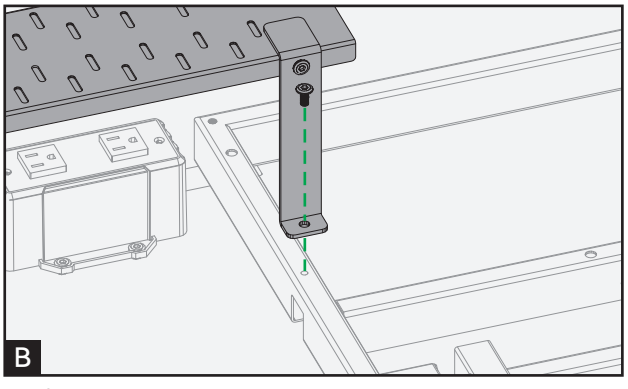


M6/8 mm

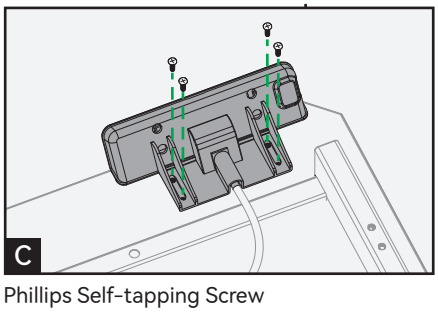


Phillips Self-tapping Screw


7 Unpack the Main Legs




Lifting Columns x2




Main Legs (Feet) x2




Allen Key (4 mm) x1



Allen Key (5 mm) x1





M6/45 mm x9




M6/20 mm x9


8 Install the Main Legs

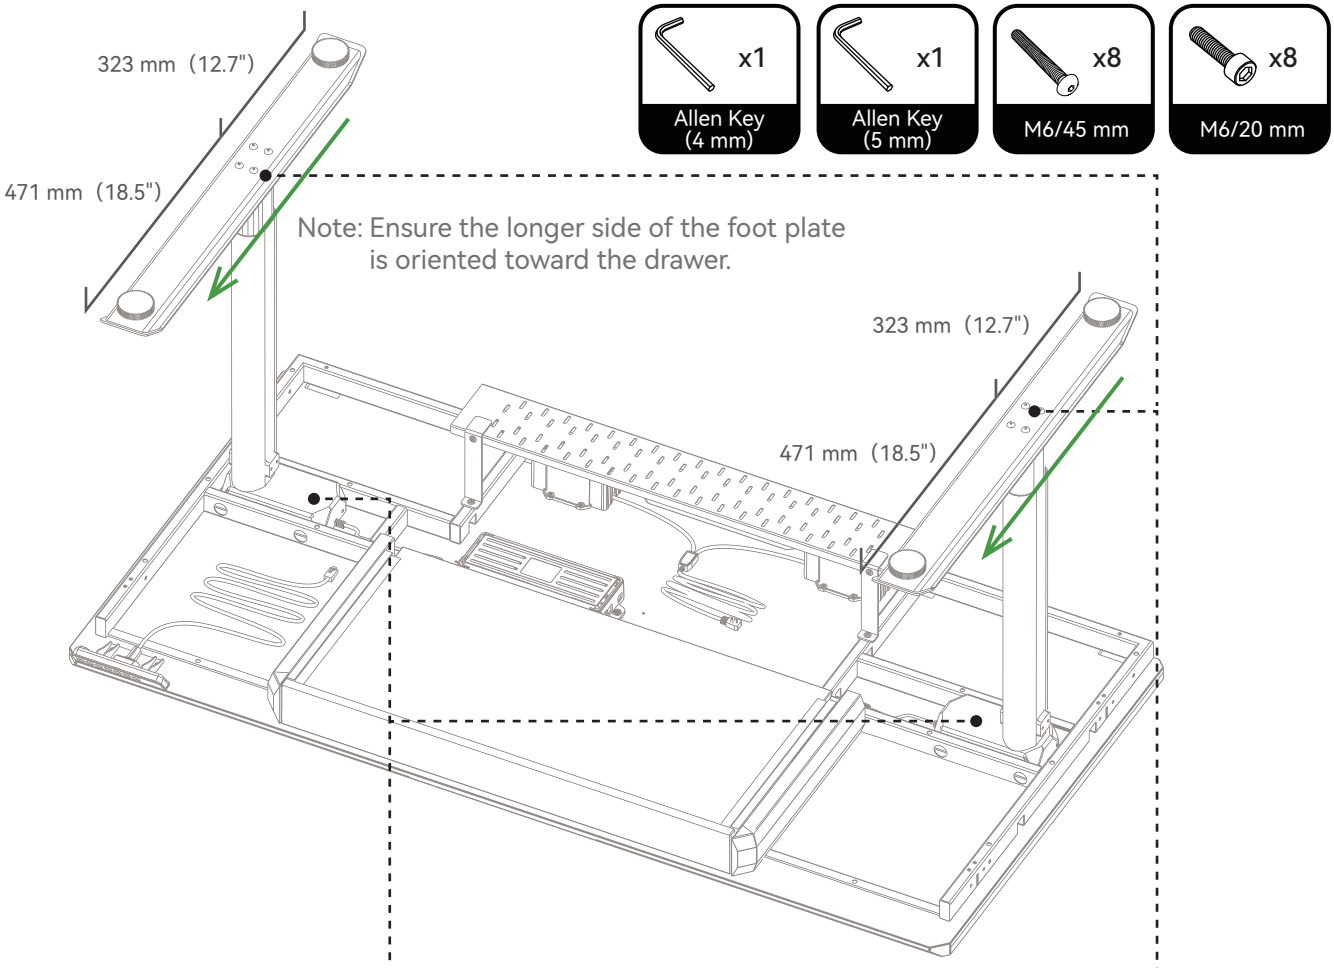

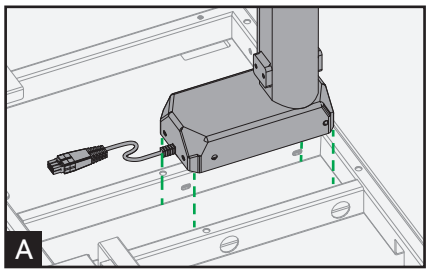

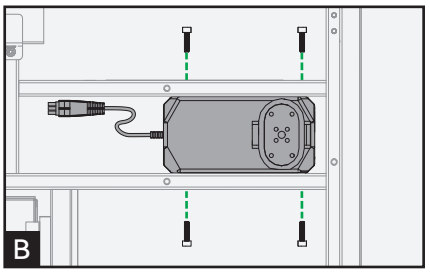



M6/20 mm

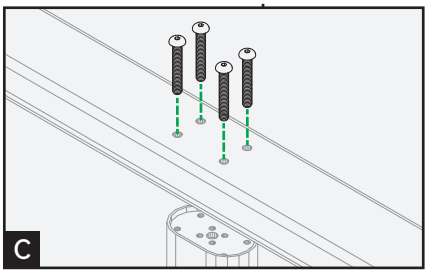


M6/45 mm

9 Connect and Route the Desk Cables

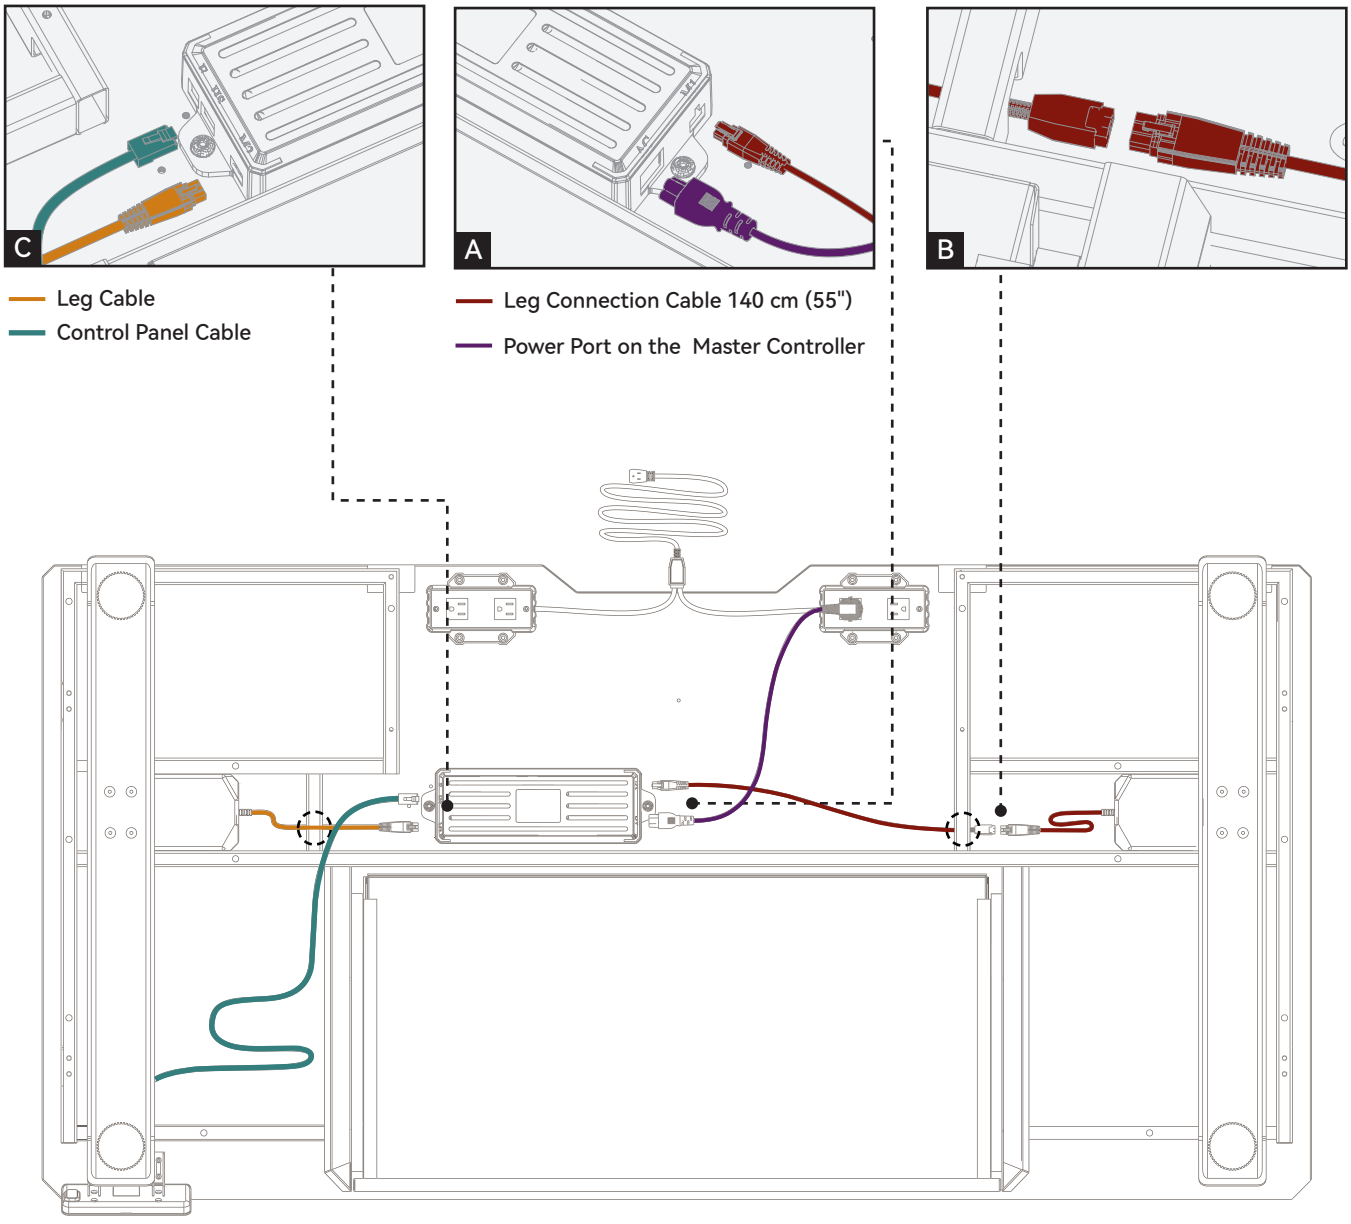

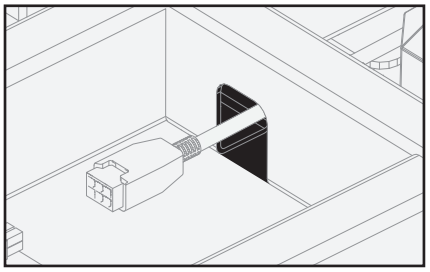


Route the leg cables through the pre-drilled holes in the frame.




Cable Clips

Use the cable management clips to secure and organize the cables.



Leg Connection Cable (55 in)

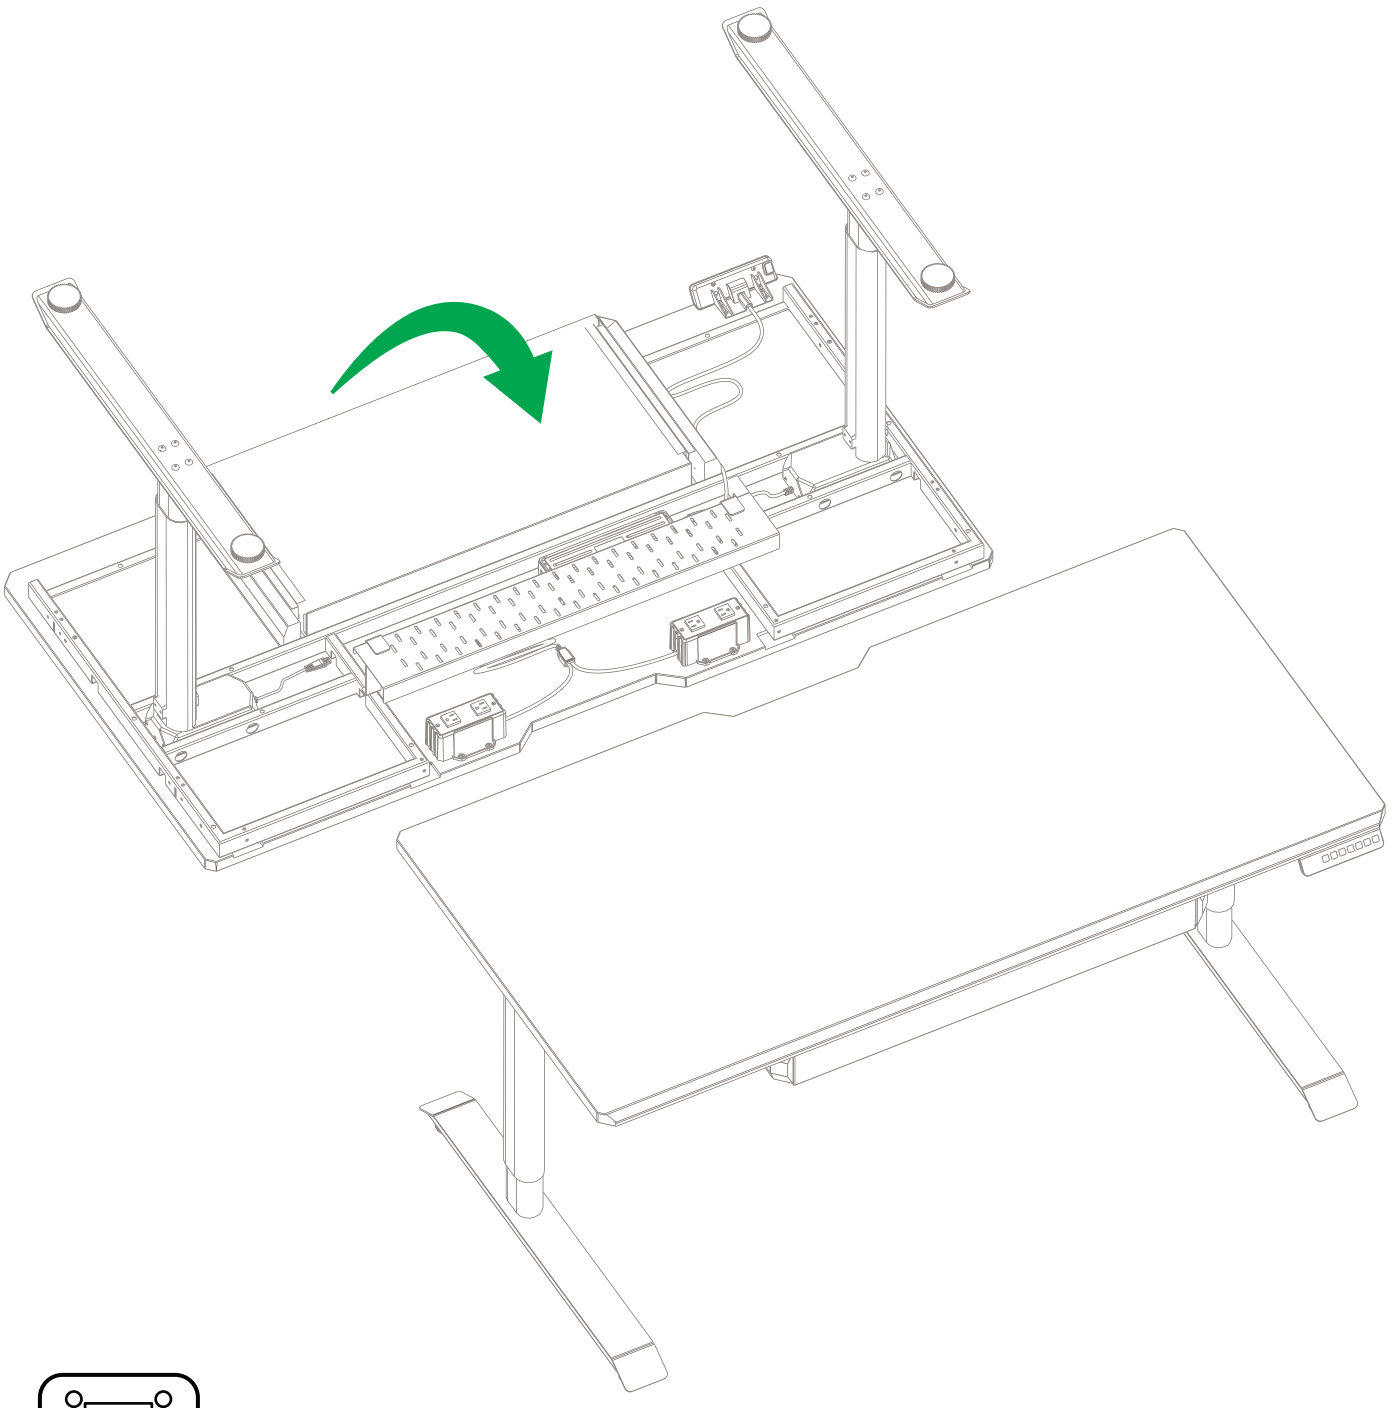




At least two people are required
to turn the desk upright.

Step-by-Step Assembly:
L-Shaped Desk / Extended L-Shaped Desk


❶ Package Overview

Note: Please confirm whether your desk is an L-Shaped Desk or an Extended L-Shaped Desk before starting the installation.


L-shaped desk




Main Desktop x1



Extension Desktop x1



Main legs x1




Extension Leg x1




Master Controller
(N3) x1


Extended L-shaped Desk




Main Desktop x1



Extension Desktop x2




Main legs x1



Extension Leg x2





Master Controller
(N4) x1





Extension Connection
Kit x1


❷ Unpack the Extension Desktop

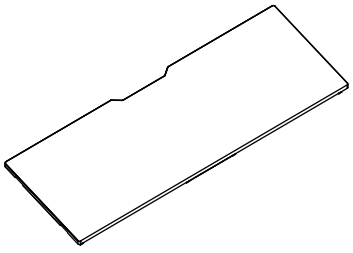

Extension Desktop x1



Extension Connection Bracket x1



Cable Management Tray x1



Tray Brackets x2


Extension Connection Lock x2



Allen Key (4 mm) x1



M6/8 mm x5


M6/12 mm x13


M6/55 mm x3

❸ Install the Extension Desktop


Set these parts aside for a later step when connecting the main desk to the extension desk.

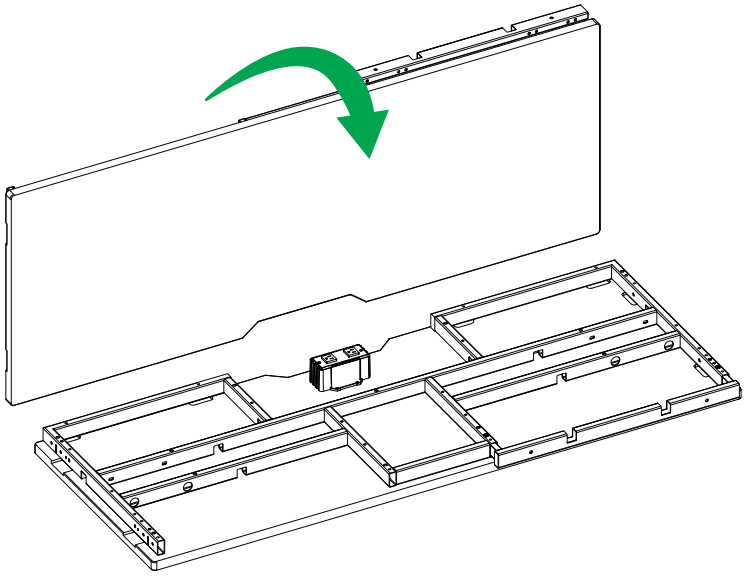





At least two people are required to flip the desktop and place it upside down on a clean, flat surface. To avoid scratches, place the foam and protective packaging underneath the desktop during assembly.






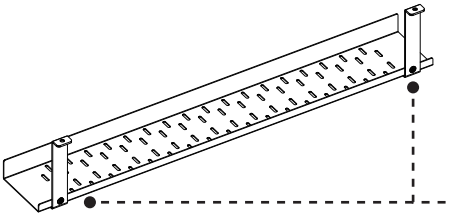

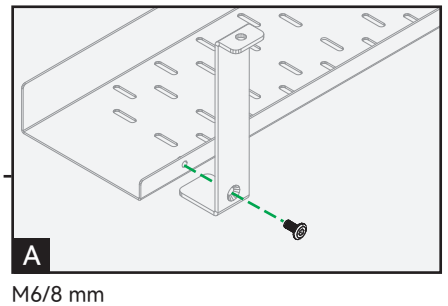


M6/8 mm

Install Right-hand L-shaped Desk

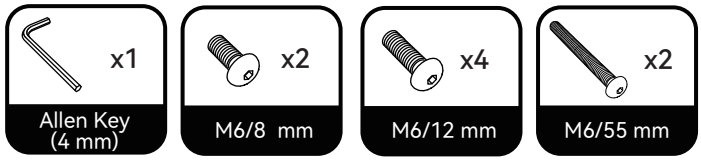


Note:
- Before installation, confirm whether your desk is configured as a left-hand or right-hand L-shape.
- After confirming the orientation, ensure all screws are fully tightened.

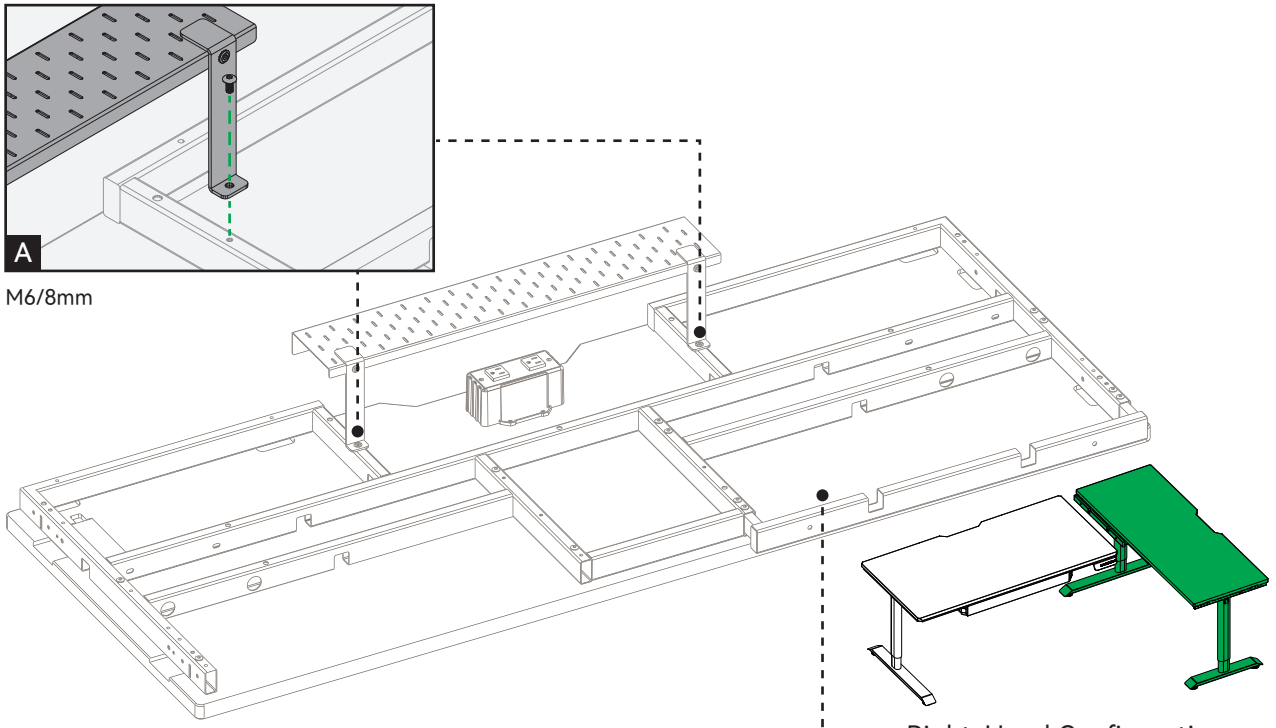

M6/8mm

Right-Hand Configuration

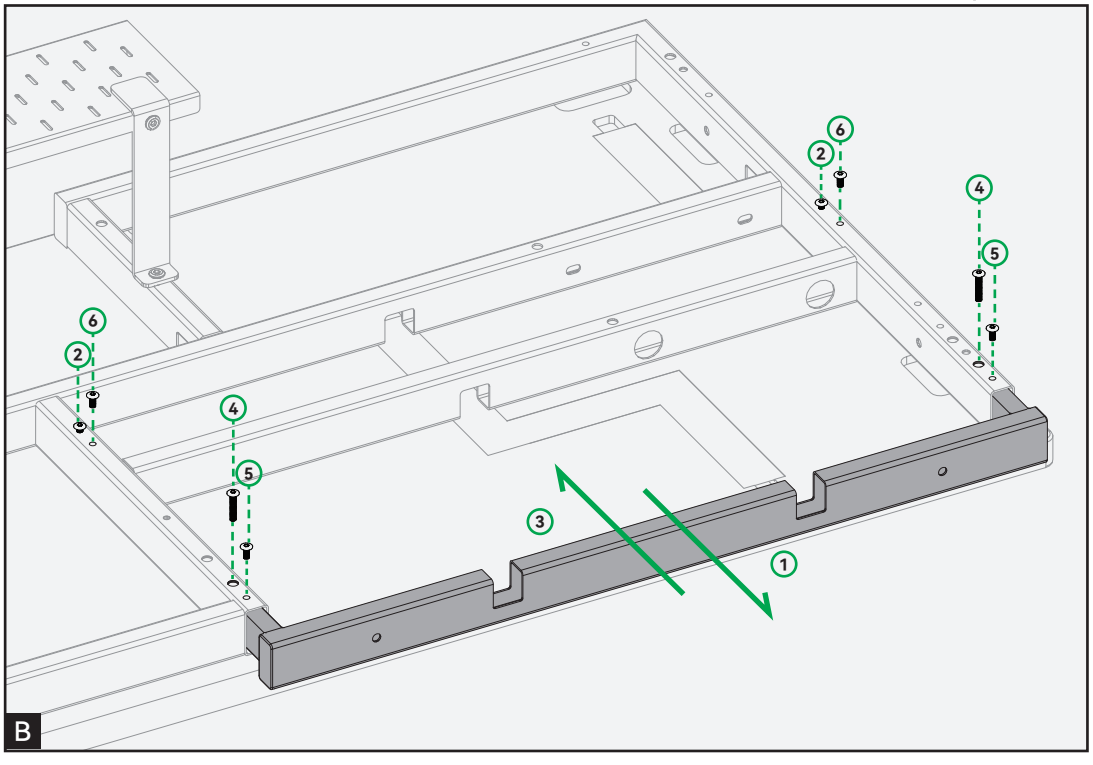


M6/12mm M6/55mm


1. Pull out the Extension Connection Bracket approximately 5 cm outward.
2. Tighten the pre-installed limit screws on the frame.
3. Slide the Extension Connection Bracket back into the frame until it rests against the limit screws.
4. Insert and tighten the M6×55 mm screws
5. Install the M6×12 mm screws as limit pins.(Note: Do not fully tighten.)
6. Repeat the same process for the other side to complete the frame positioning.

Note: Ensure all screws are fully tightened.


Install Left-hand L-shaped Desk

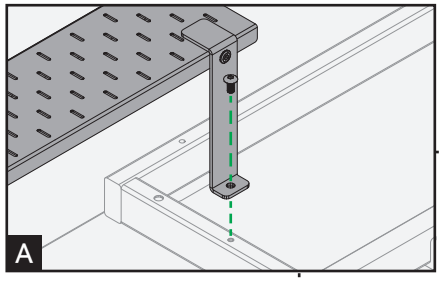



M6/8mm

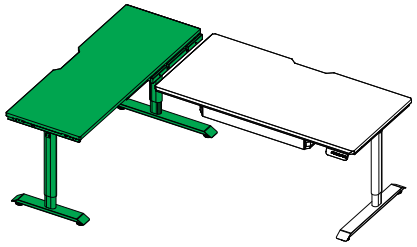


Left-Hand Configuration

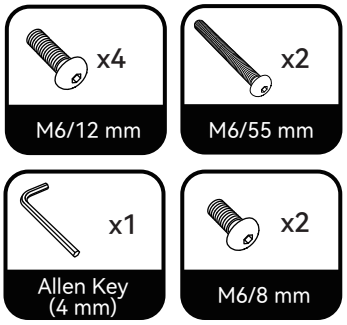

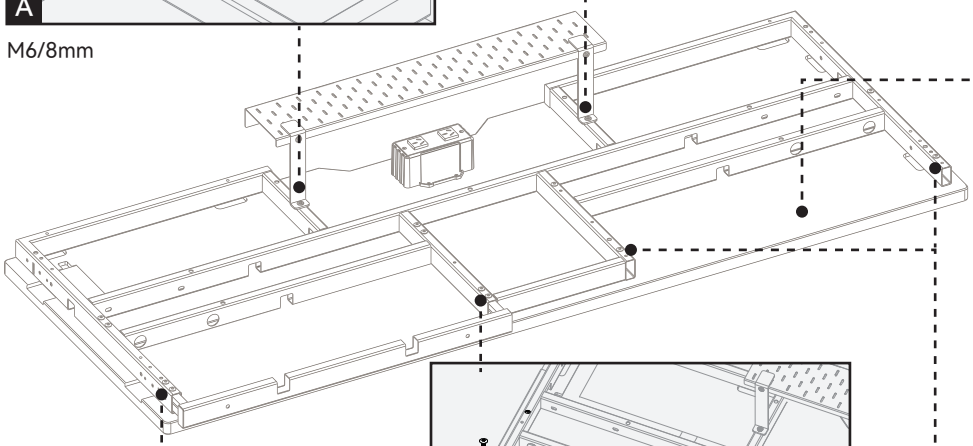


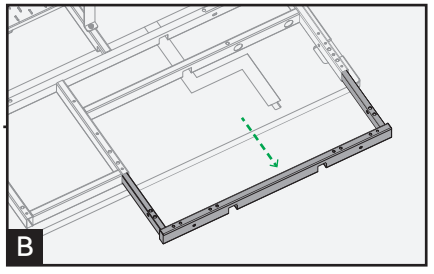

Remove the Extension Connection Bracket

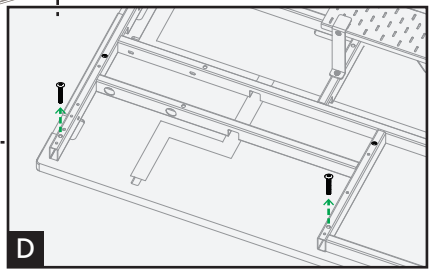


Remove the M6×55 mm screws and keep them for later use.

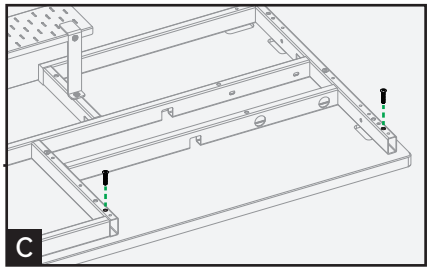

M6/55mm

Secure the frame to the desktop using the M6×55 mm screws through the second mounting holes.

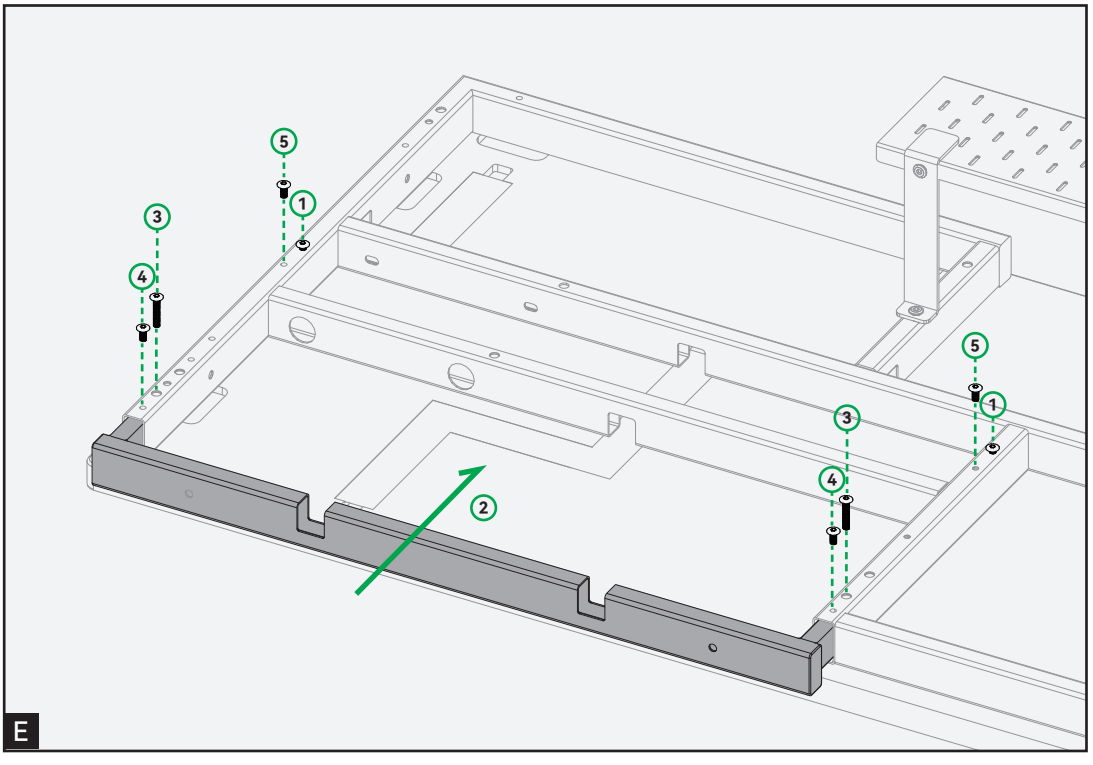



M6/12mm M6/55mm


1. Tighten the pre-installed limit screws on the frame.
2. Slide the Extension Connection Bracket back into the frame until it rests against the limit screws.
3. Insert and tighten the M6×55 mm screws.
4. Install the M6×12 mm screws as limit pins.(Note: Do not fully tighten.)
5. Repeat the same process for the other side to complete the frame positioning.


Note: Ensure all screws are fully tightened.


4 Unpack the Extension Leg



Lifting Column x1


Extension Leg (Foot) x1


Allen Key (4 mm) x1



Allen Key (5 mm) x1



M6/45 mm x5



M6/20 mm x5

5 Install the Extension Leg


IMPORTANT: Install the extension leg on the correct side based on whether your desk is configured as a left-hand or right-hand L-shaped desk.

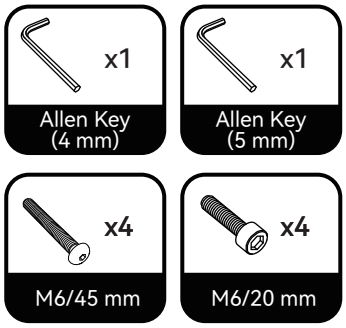


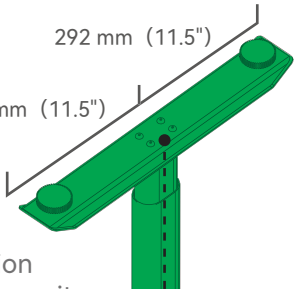


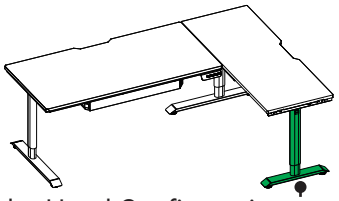

Right-Hand Configuration

Note: Install the extension desktop on the opposite side of the Extension Connection Bracket to ensure correct assembly.

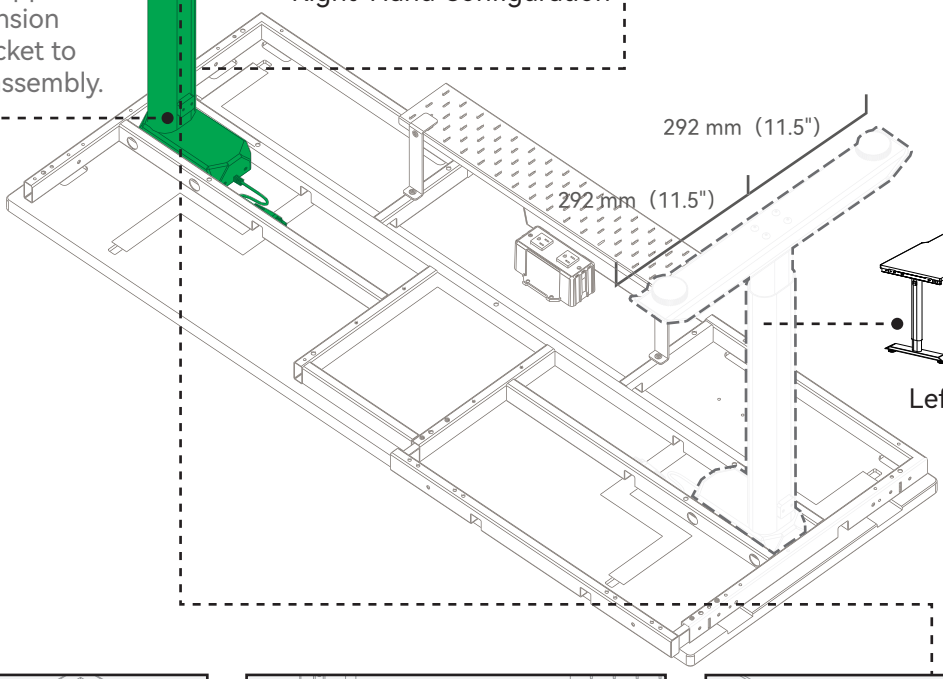


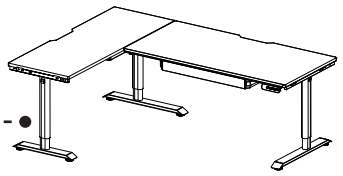
Left-Hand Configuration

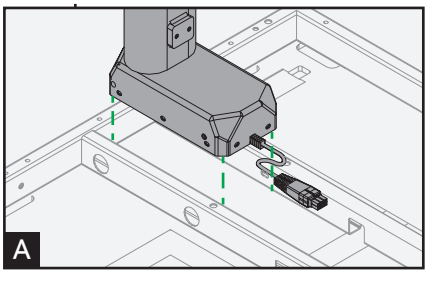

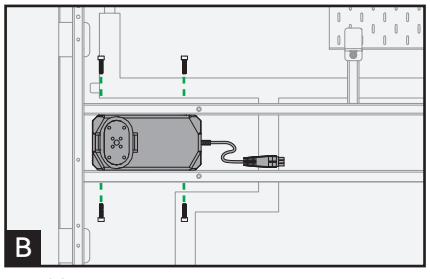


M6/20 mm

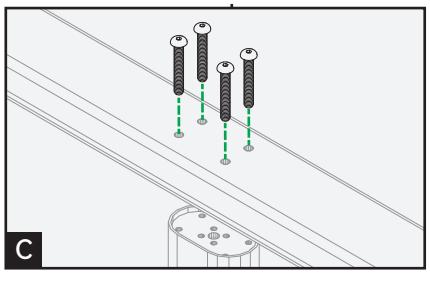


M6/45 mm

6 Unpack the Extension Connection Kit


IMPORTANT: This step applies only to the Extended L-Shaped Desk (CR-L2). If you have the L-Shaped Desk (CR-L), skip this step.

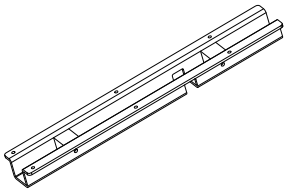


Extension Connection Kit x1




Allen Key (4 mm) x1



Allen Key (5 mm) x1



11–13 mm open-end wrench x1




M6/20 mm x7




M8/100 mm x3

7 Install the Extension Connection Kit on the First Extension Desk

IMPORTANT: Install the Extension Connection Kit on the same side as the extension leg. The diagram shows a right-hand configuration.

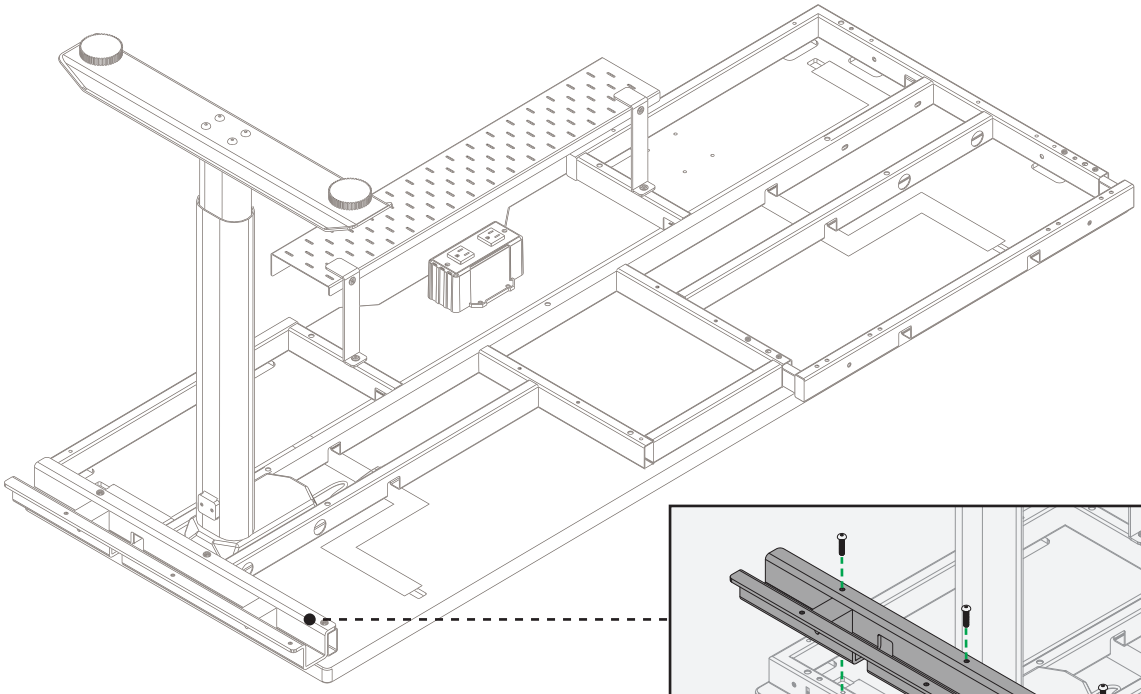

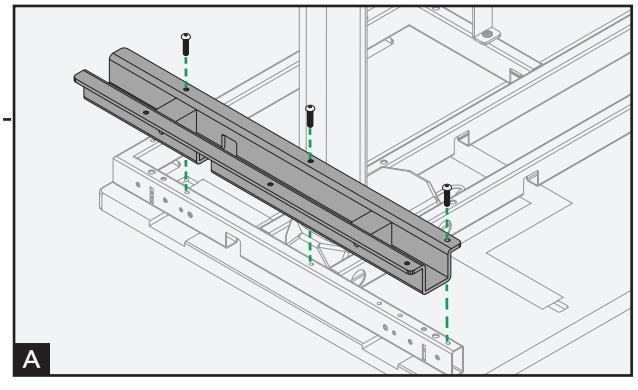



M6/20 mm








8 Unpack the Main Legs



Lifting Columns x2


Main Legs (Feet) x2


Allen Key (4 mm) x1



Allen Key (5 mm) x1


M6/45 mm x9



M6/20 mm x9

9 Install the Main Leg on the Extension Desktop


Note: The diagram shows a right-hand configuration.

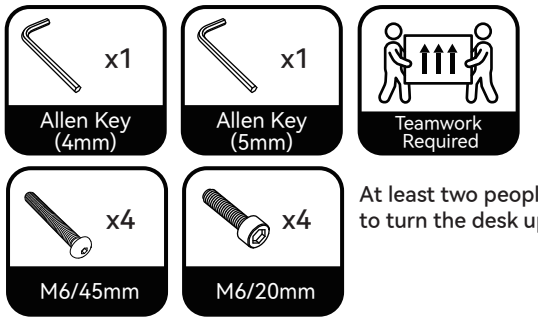


At least two people are required to turn the desk upright.

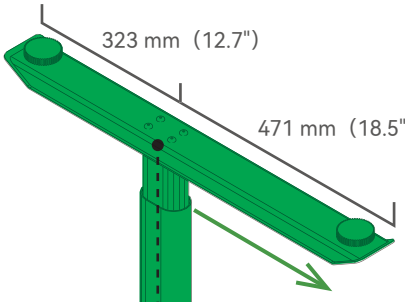



Note: Incorrect orientation may affect installation. Ensure the longer side of the main foot plate faces the Extension Connection Bracket.

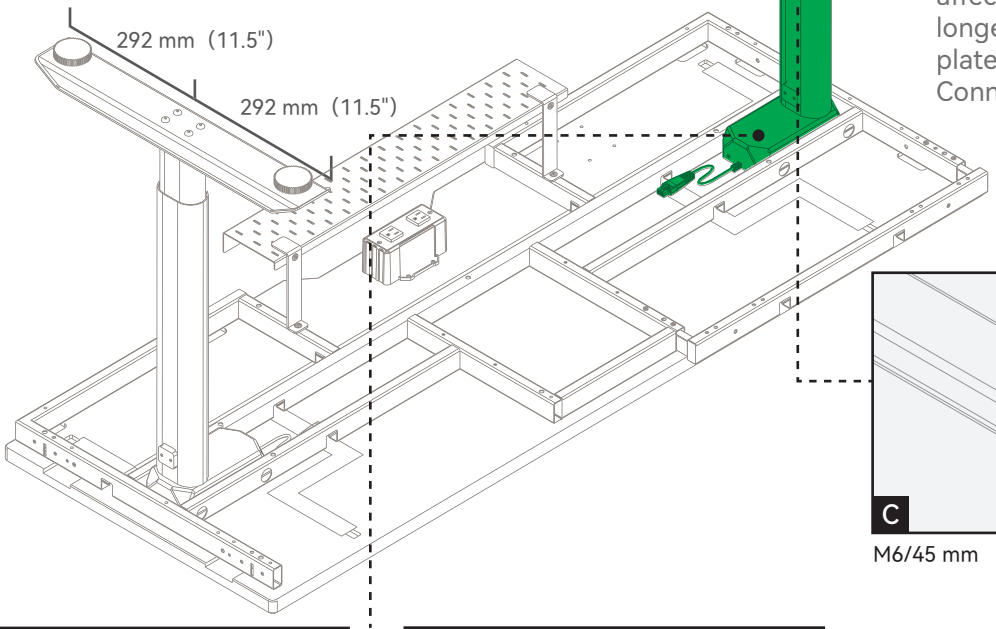

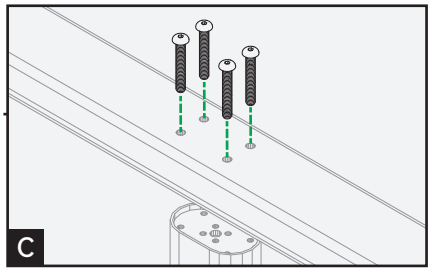


M6/45 mm

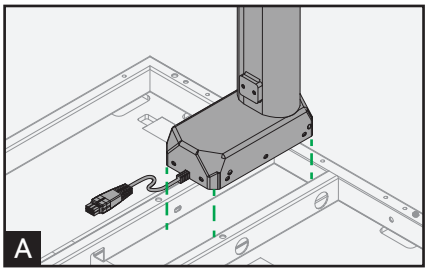


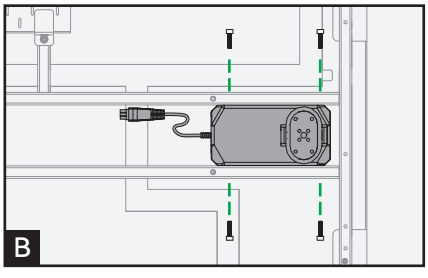


M6/20 mm

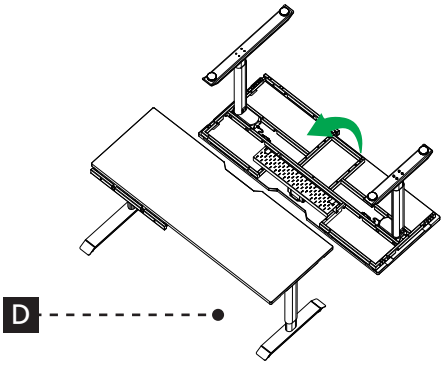


10 Unpack the Main Desktop

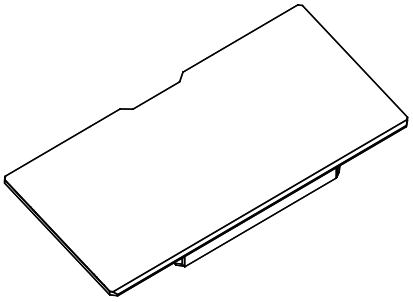


Main Desk x1

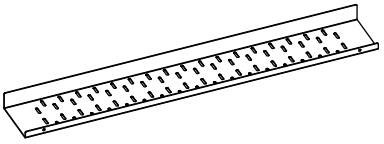


Cable Management Tray x1



Tray Brackets x2



Control Panel x1



Allen Key
(4 mm) x1



Phillips
Self-tapping Screw x1




Phillips
Screwdriver x1



Cable Management
Clips x10

11 Install the Main Desktop

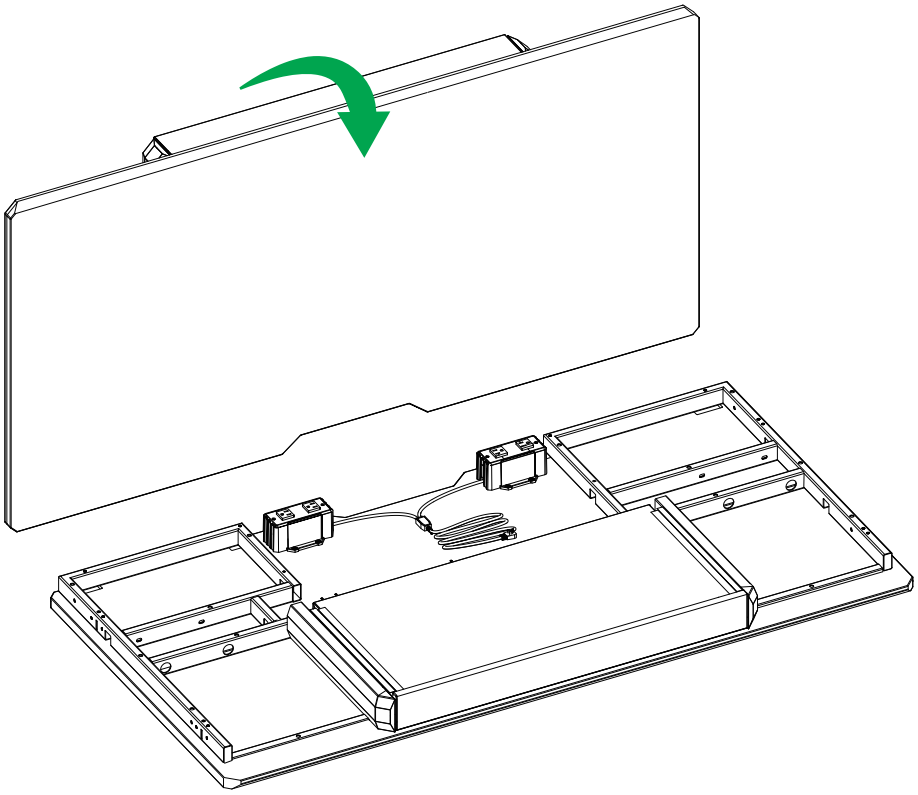





At least two people are required to flip the desktop and place it upside down on a clean, flat surface. To avoid scratches, place the foam and protective packaging underneath the desktop during assembly.

12 Unpack the Master Controller

L-Shaped Desk (N3)




Master Controller (N3) x1



Leg Connection Cable 260 cm (102") x2



Leg Connection Cable 140 cm (55") x2




N3 Controller Power Cable x1




Allen Key (4 mm) x1

Extended L-Shaped Desk (N4)




Master Controller (N4) x1



Leg Connection Cable 260 cm (102") x3



Leg Connection Cable 140 cm (55") x2




N4 Controller Power Cable x1




M6/16 mm x3


13 Install the Master Controller

Note: Use the correct master controller for your desk configuration.







This is a spare cable.
Keep it for future use.

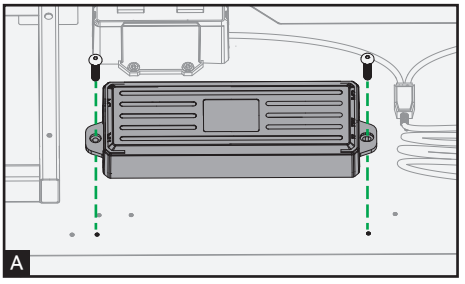

N3 Master Controller (L-Shaped Desk)

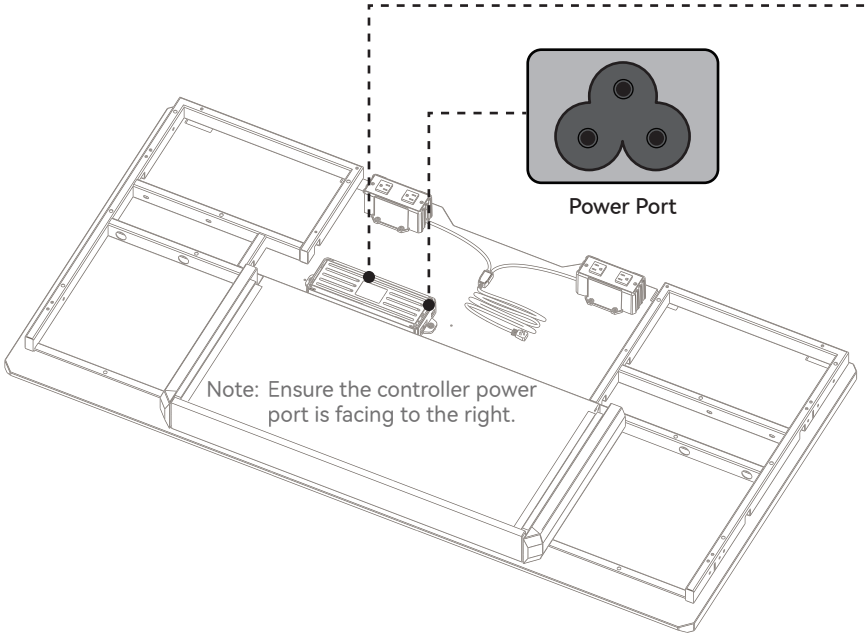


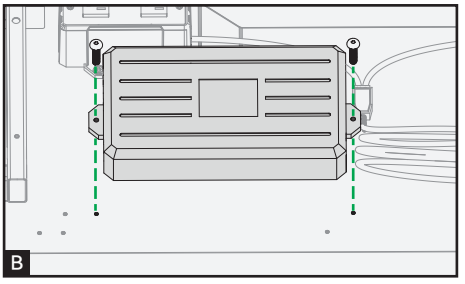


N4 Master Controller (Extended L-Shaped Desk)

14 Install the Cable Management Tray and Control Panel


Note: Do not overtighten the screws.

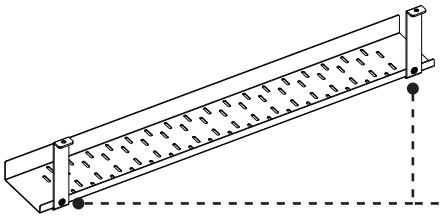


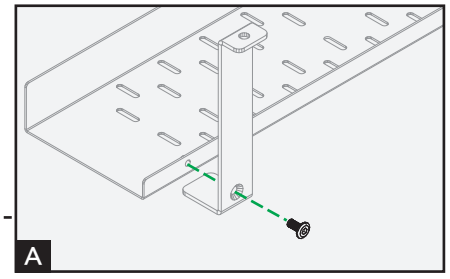


M6/8 mm



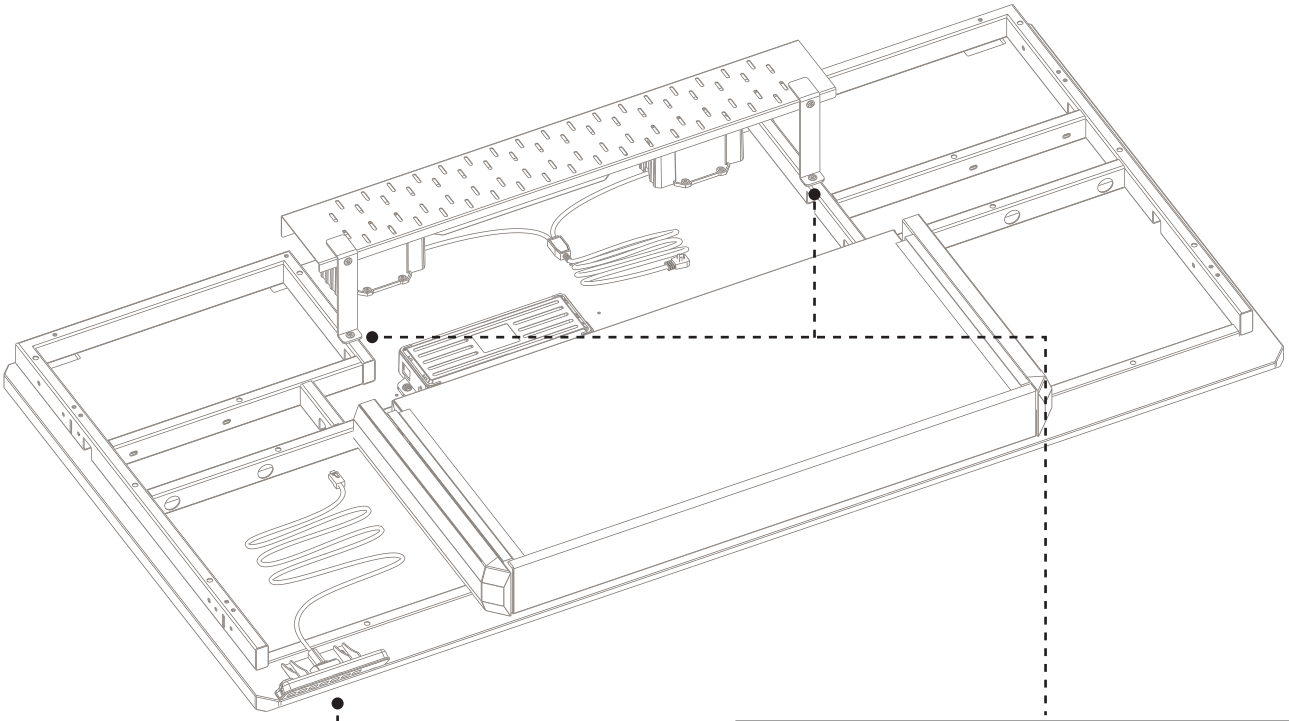

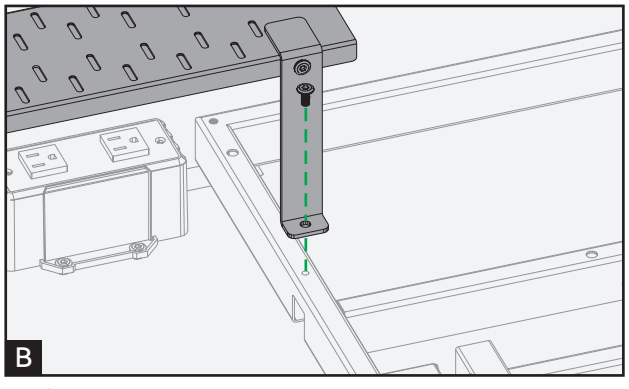


M6/8 mm

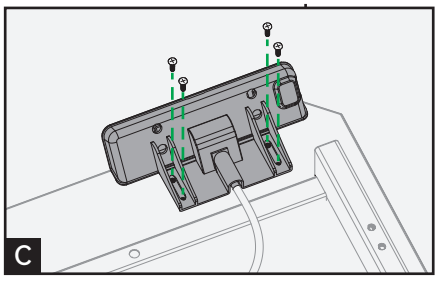


Phillips Self-tapping Screw


15 Install the Main Desk Leg

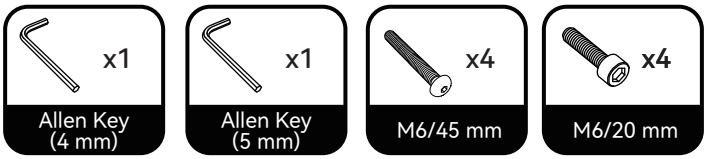

IMPORTANT: Install the main desk leg on the correct side based on whether your desk is configured as a left-hand or right-hand L-shaped desk.

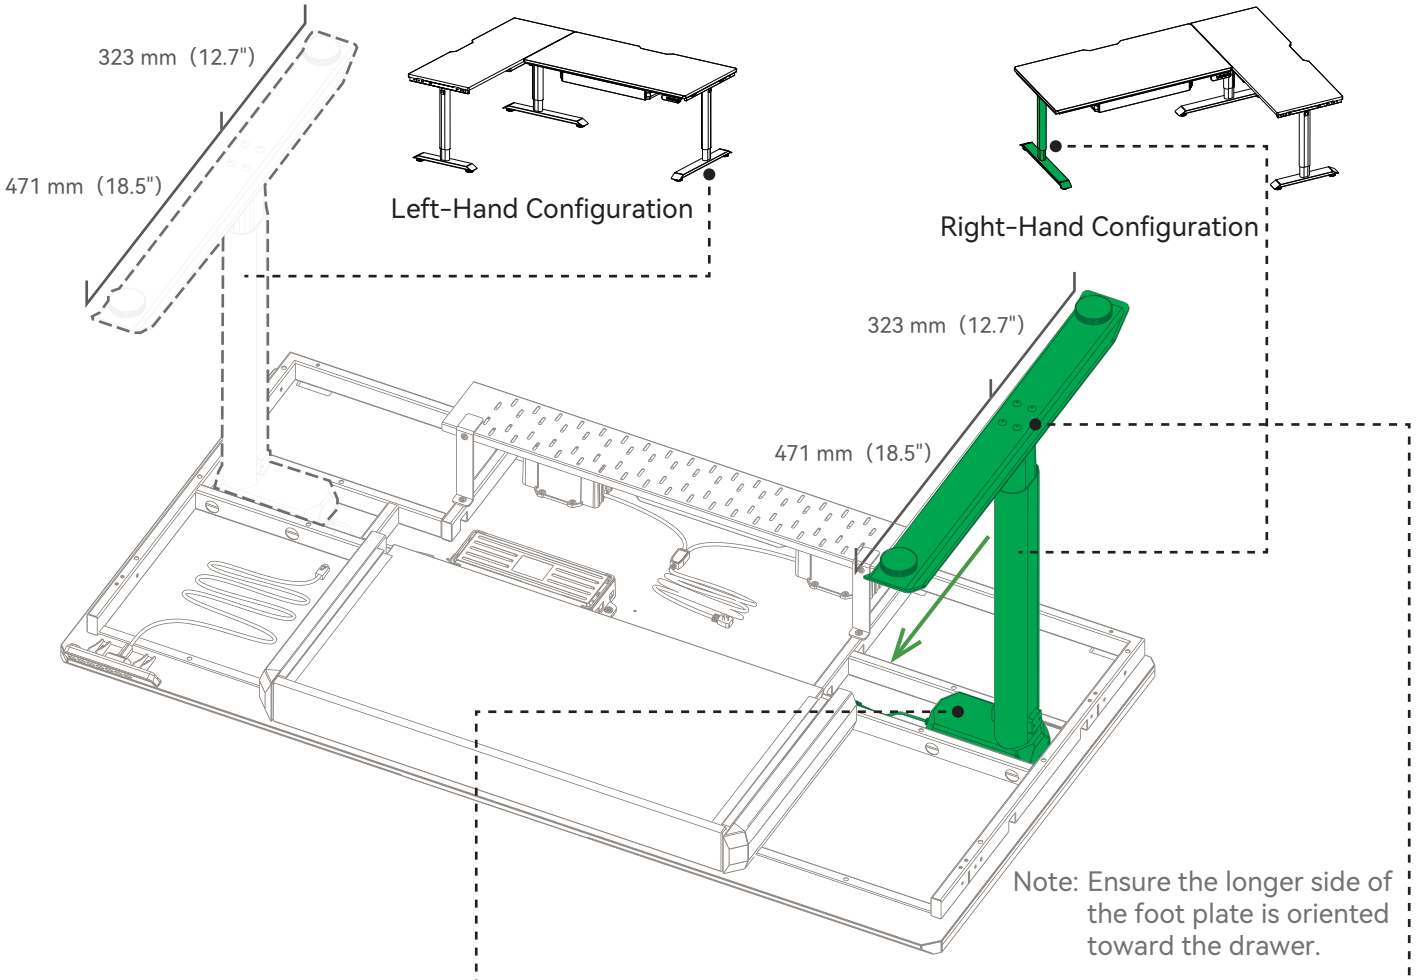

Note: Ensure the longer side of the foot plate is oriented toward the drawer.

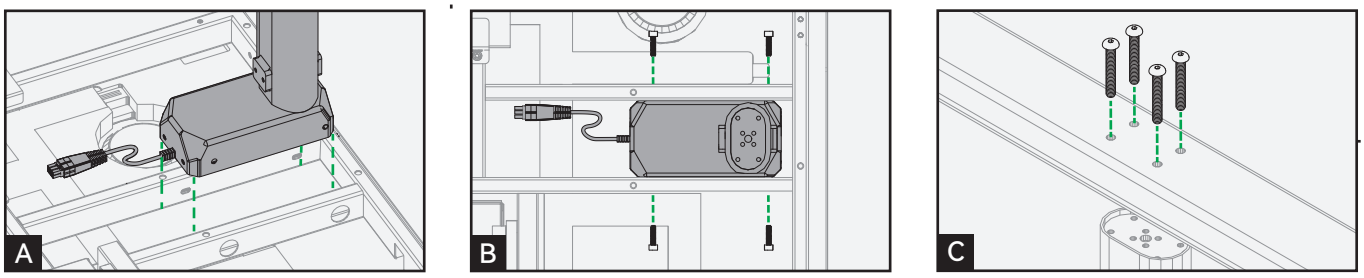

M6/20 mm


M6/45 mm

16 Connect the Main Desktop to the Extension Connection Bracket







Note: The diagram shows a right-hand L-shaped desk.

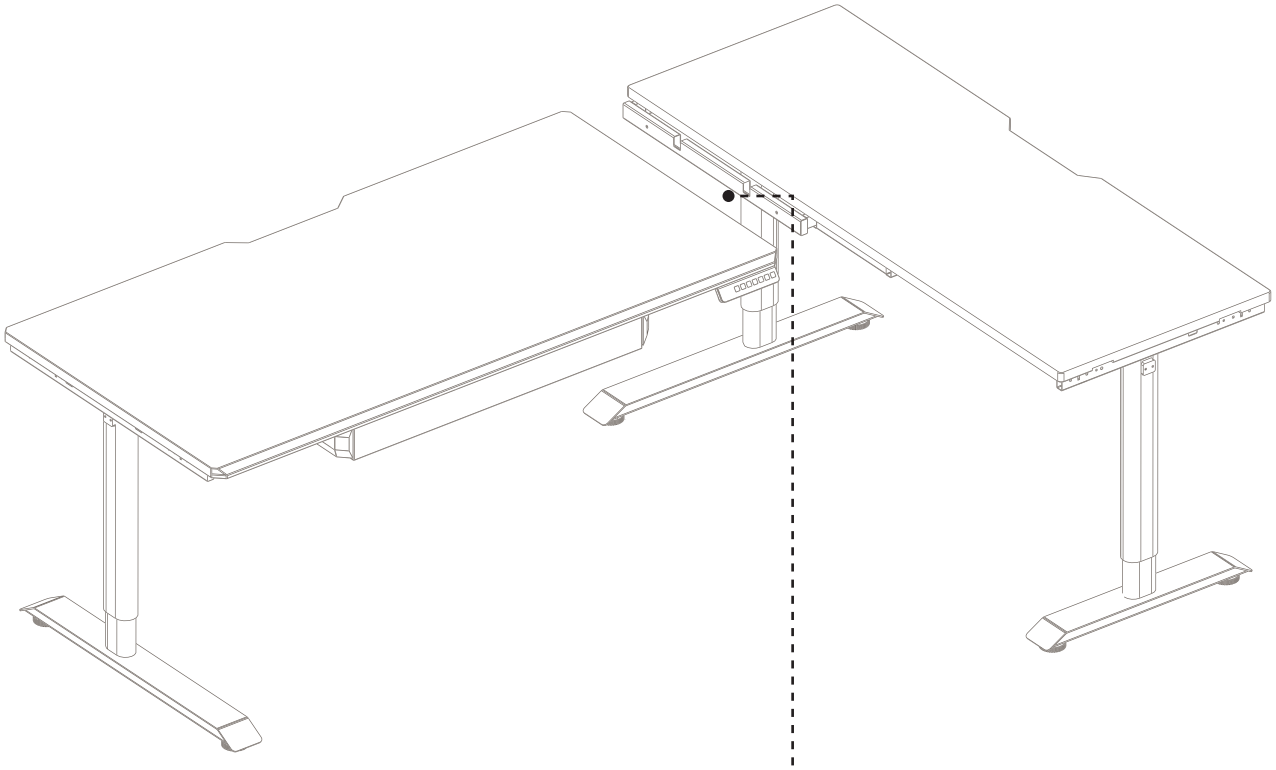



At least two people are required. Lift the main desktop and place it onto the side connector bracket.

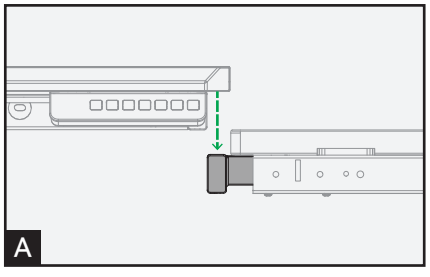


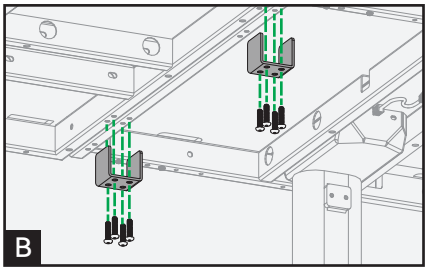


M6/12 mm

17 Connect and Route the Desktop Cables


IMPORTANT: This step applies only to the L-Shaped Desk (CR-L). If you are assembling the Extended L-Shaped Desk (CR-L2), skip this step.


Cable Clips


x2
Leg Connection Cable
140 cm (55")


x1
Leg Connection Cable
260 cm (102")


Use the cable management clips to secure and organize the cables.

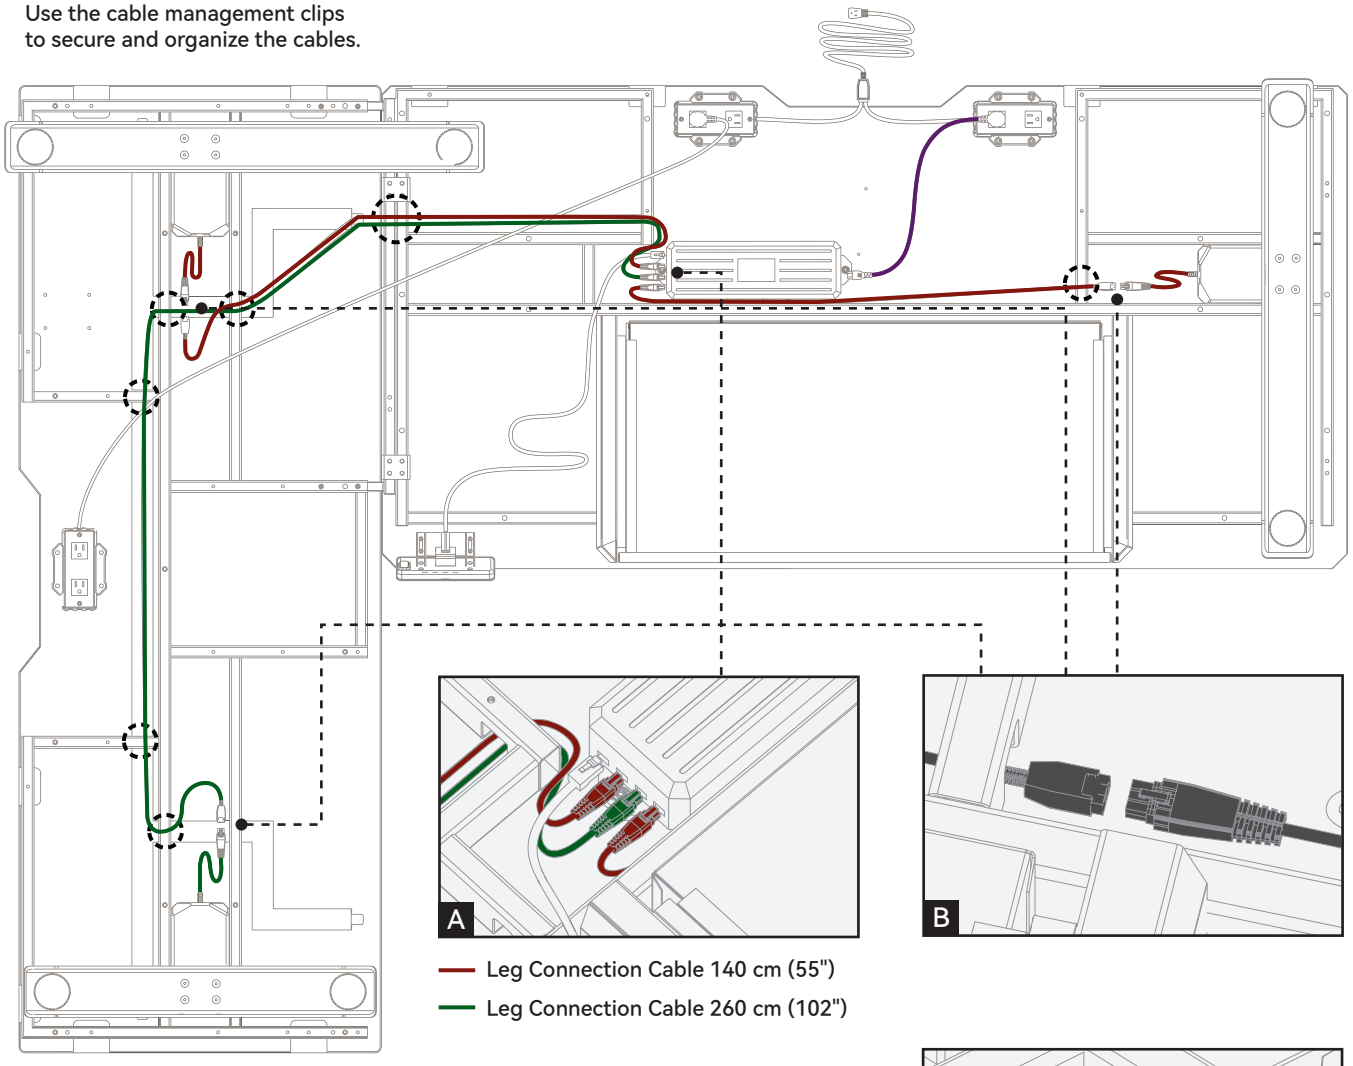


A

B

Leg Connection Cable 140 cm (55")
Leg Connection Cable 260 cm (102")

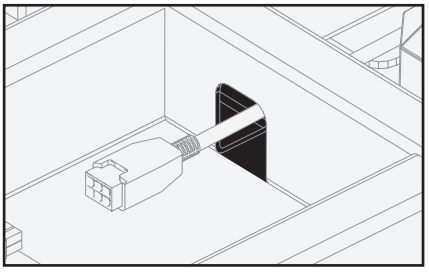


Route the leg cables through the frame's pre-drilled holes to the master controller.

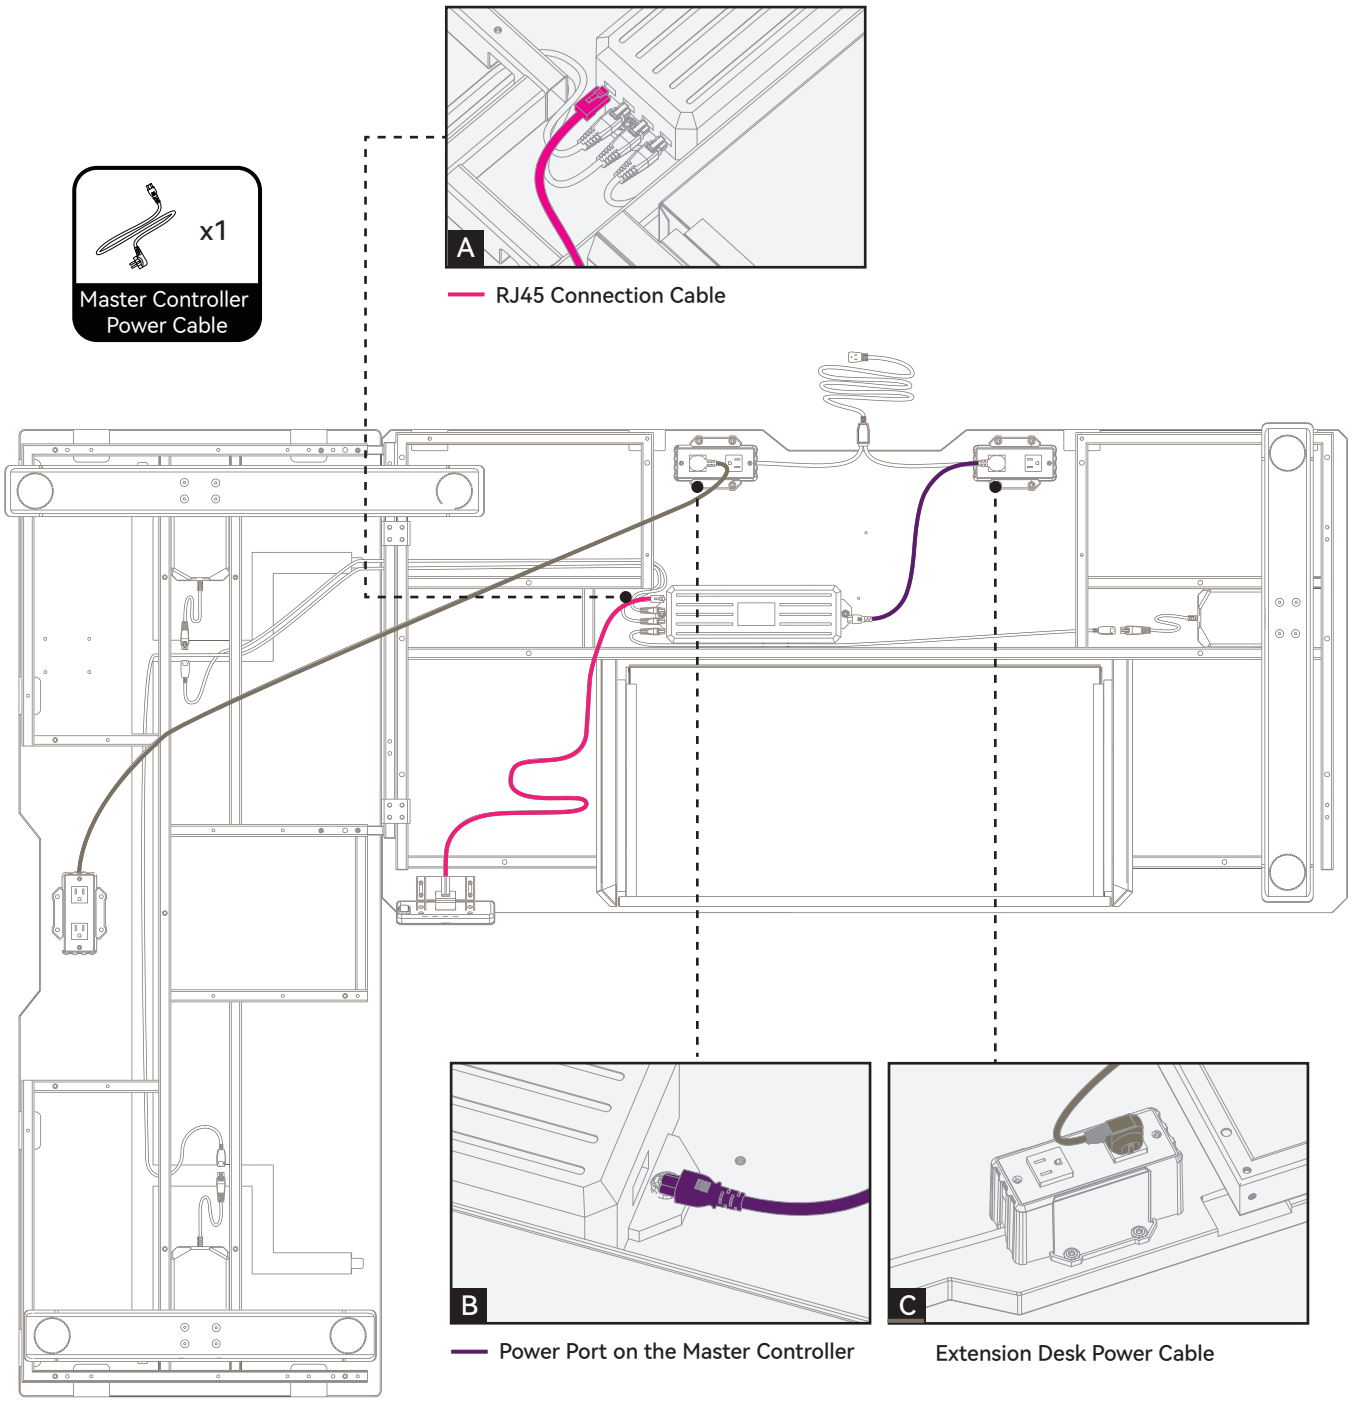


IMPORTANT: Confirm that all cable connections are fully seated before powering on the desk.


18 Unpack the Second Extension Desktop

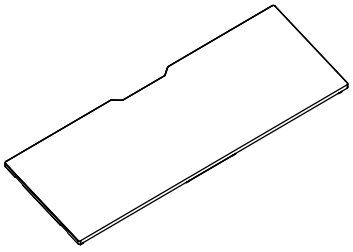


Extension Desktop x1

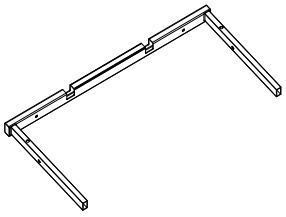


Extension Connection Bracket x1

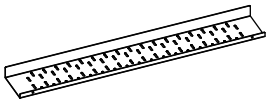

Cable Management Tray x1




Tray Brackets x2




Extension Connection Lock x2




Allen Key (4 mm) x1



M6/8 mm x5




M6/12 mm x13




M6/55 mm x3

19 Install the Second Extension Desktop




Set these parts aside for a later step when connecting the main desk to the extension desk.

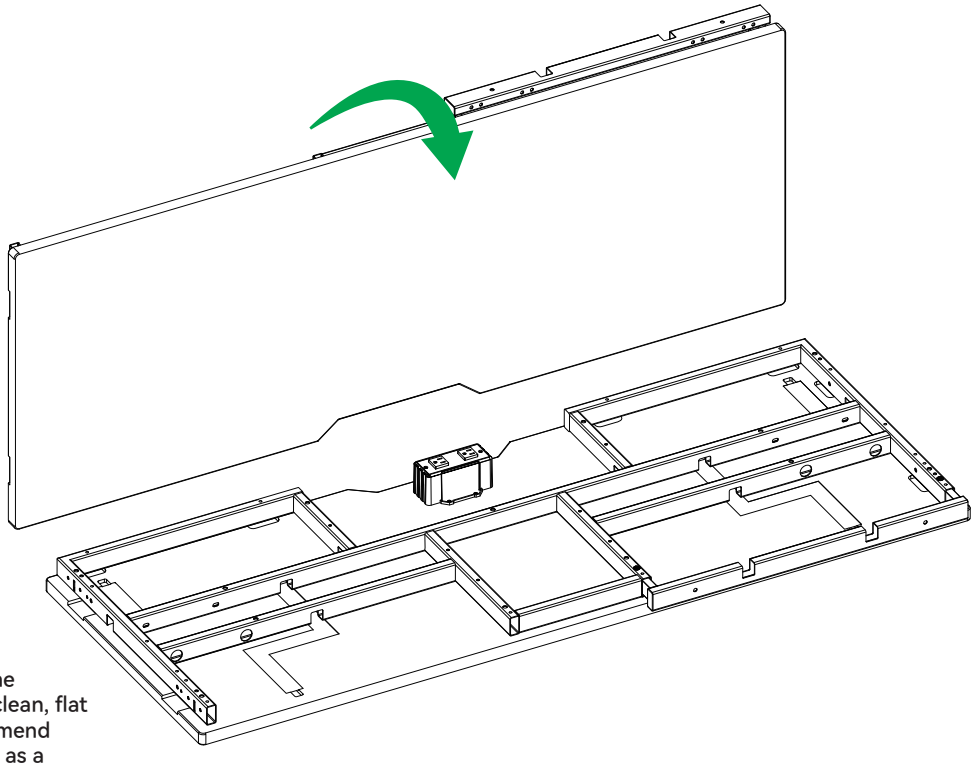





At least two people are needed to flip the desktop and place it upside down on a clean, flat surface. To prevent scratches, we recommend placing the foam packaging on the floor as a protective layer during installation.


Note: Do not overtighten the screws.

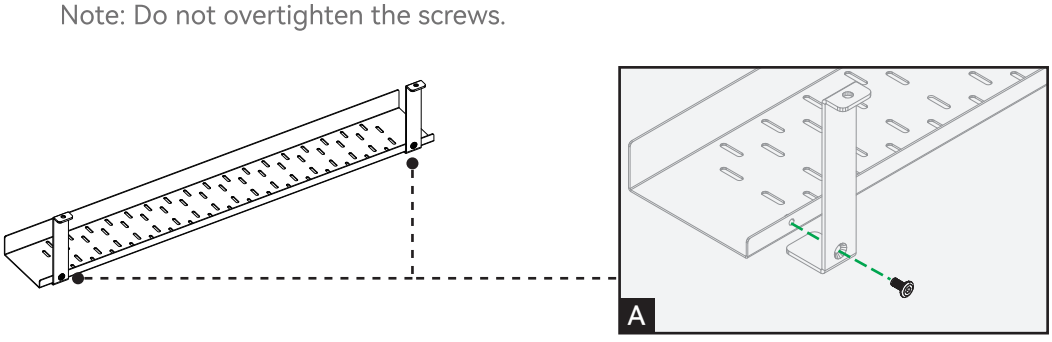

M6/8 mm

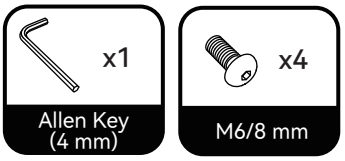


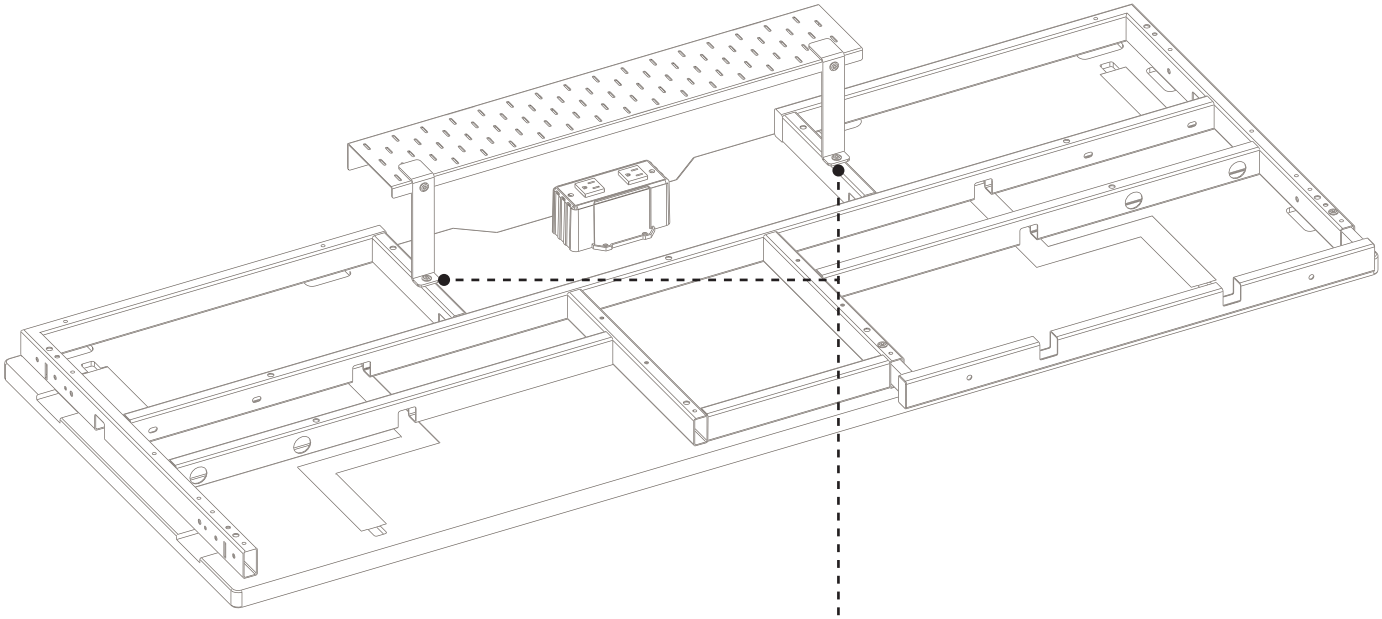


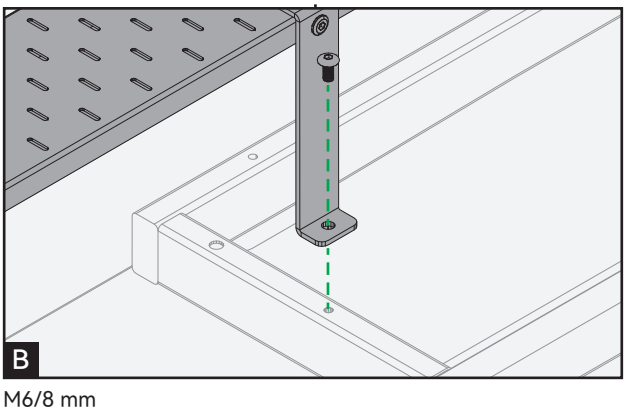



M6/8 mm


20 Unpack the Second Extension Leg



Lifting Column x1


Extension leg (Foot) x1


Allen Key (4 mm) x1



Allen Key (5 mm) x1



M6/45 mm x5


M6/20 mm x5


21 Install the Second Extension Leg

IMPORTANT: Install the second extension leg on the outer side of the extension desktop based on your selected left-hand or right-hand configuration.

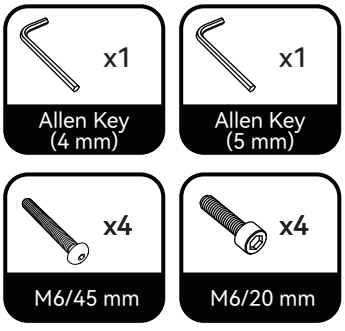


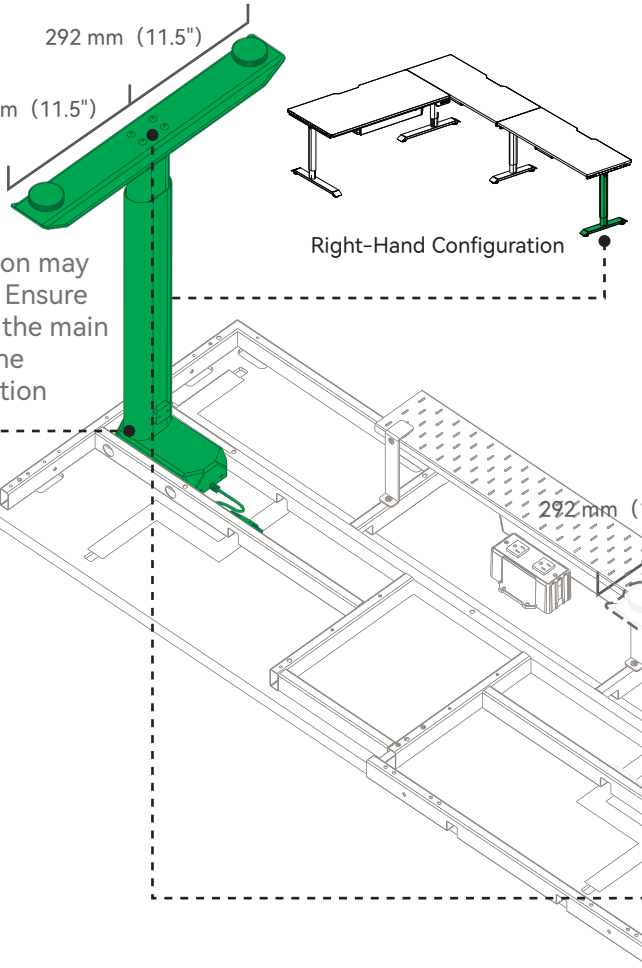


Right-Hand Configuration

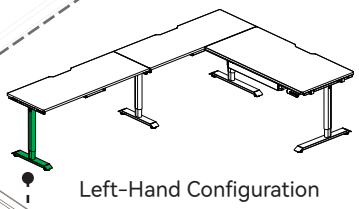

Left-Hand Configuration

Note: Incorrect orientation may affect installation. Ensure the longer side of the main foot plate faces the Extension Connection Bracket.

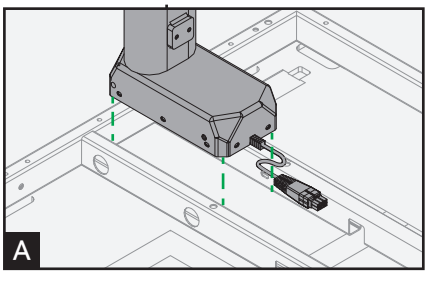

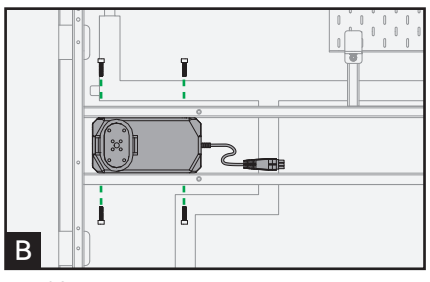

M6/20 mm

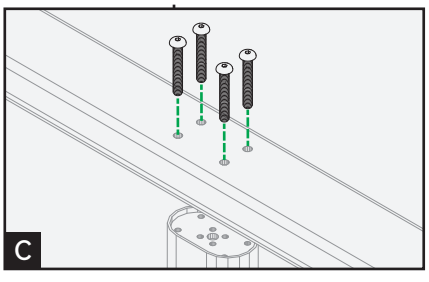

M6/45 mm

22 Connect the Second Extension Desktop


Note: The diagram shows a right-hand configuration.





IMPORTANT: Make sure the extension connection kit is fully tightened before proceeding.




At least two people are required to lift the second extension desk and secure it to the first extension desk.

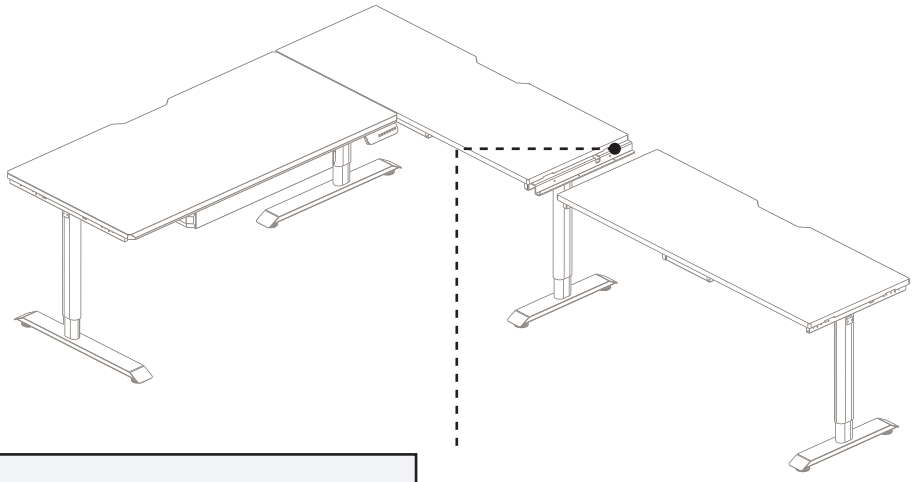

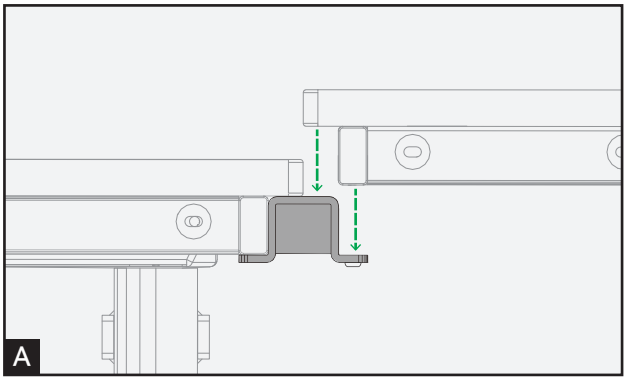


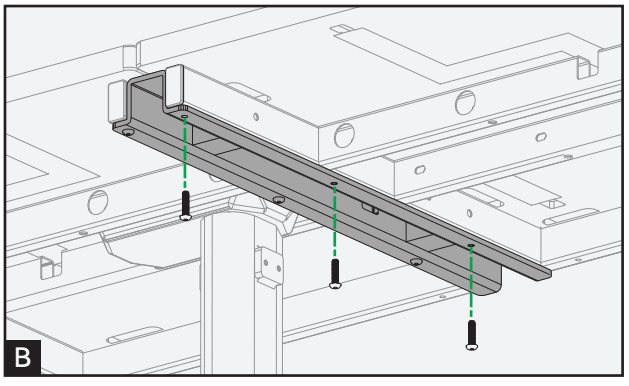

M6/20 mm

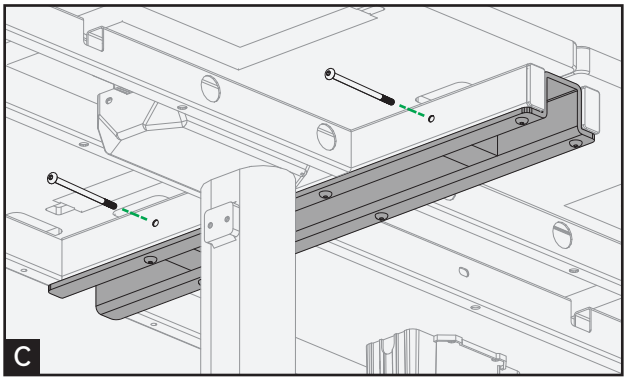


M8/100 mm

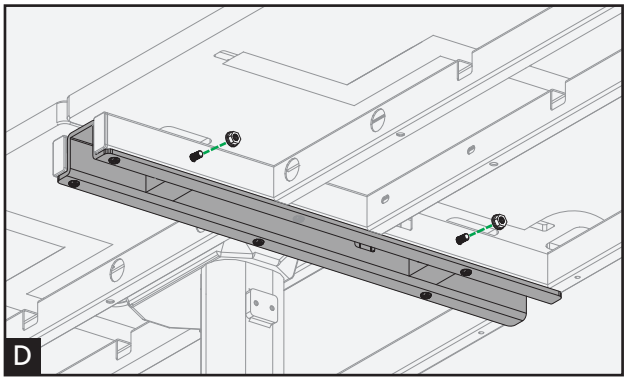

M8/100 mm

23 Wiring and Cable Management

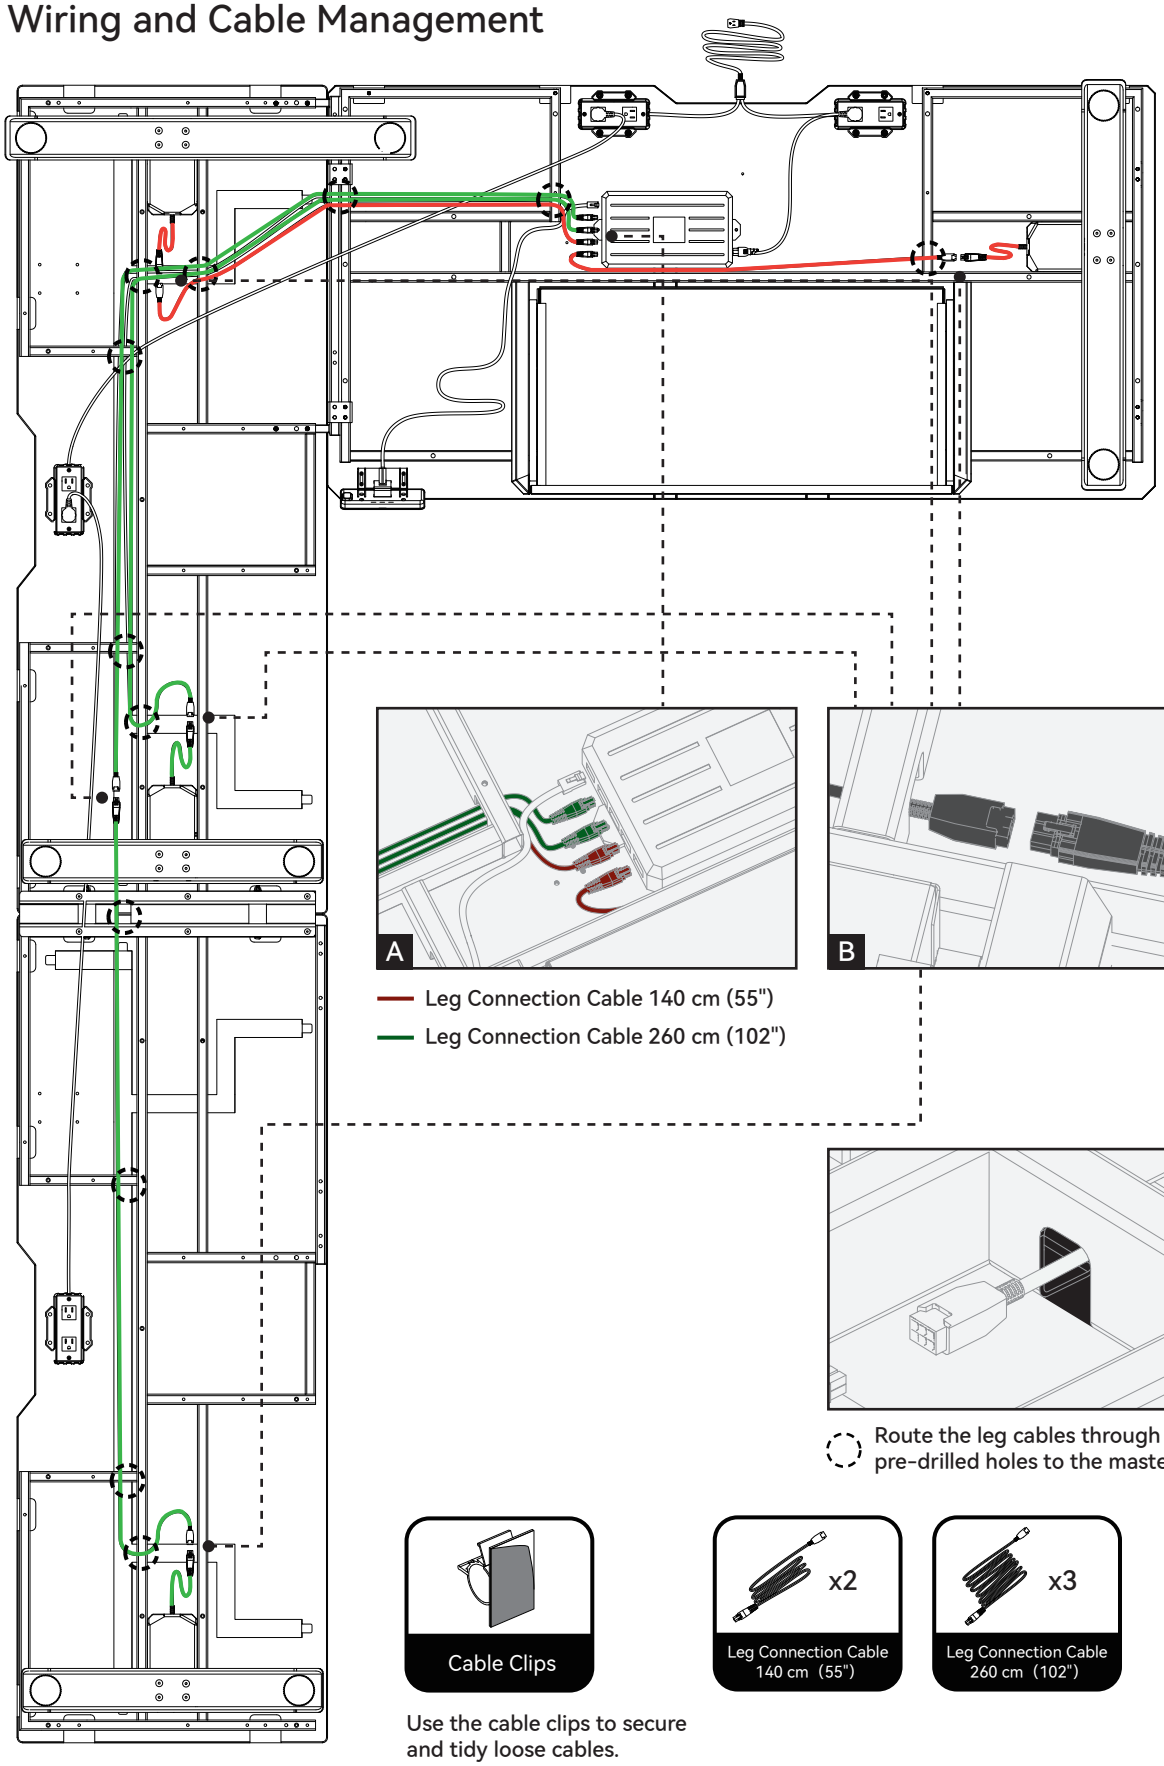


Cable Clips

Use the cable clips to secure and tidy loose cables.

Leg Connection Cable 140 cm（55"）

Leg Connection Cable 260 cm（102"）

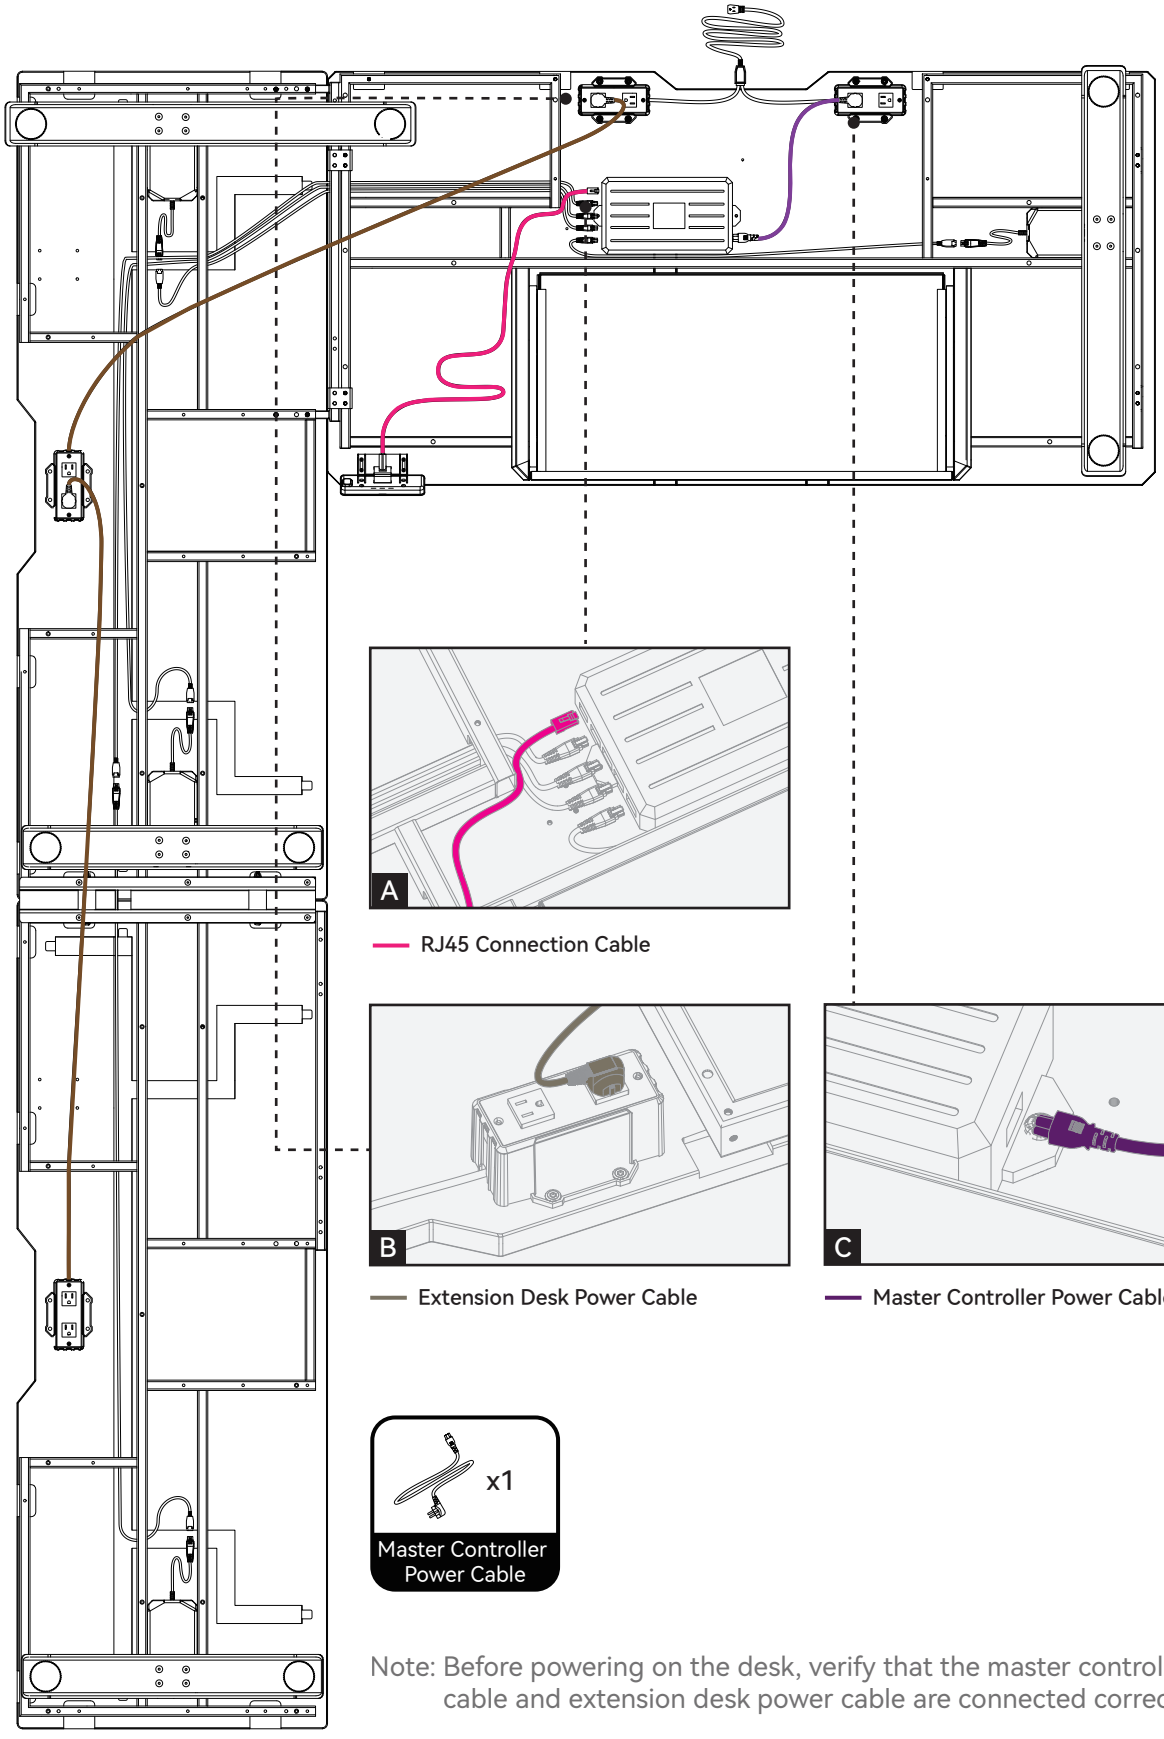


Note: Before powering on the desk, verify that the master controller power cable and extension desk power cable are connected correctly.


Step-by-Step Assembly: U-Shaped Desk

❶ Package Overview


U-shaped Desk

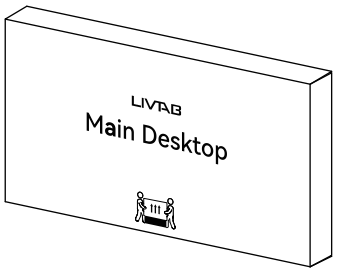


Main Desktop x1



Extension Desktop x2




Main Legs x1



Extension Leg x2




Master Controller (N4) x1




Extension Connection Kit x1


❷ Unpack the Extension Desktop

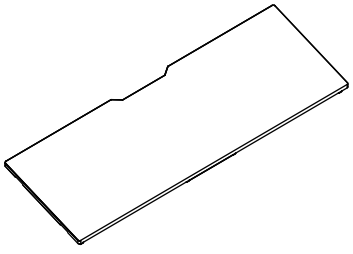


Extension Desktop x1




Extension Connection Bracket x1



Cable Management Tray x1




Tray Brackets x2




Extension Connection Lock x2




Allen Key (4 mm) x1



M6/8 mm x5




M6/12 mm x13




M6/55 mm x3

❸ Install the Left-hand Extension Desktop





Set these parts aside for a later step when connecting the main desk to the extension desk.

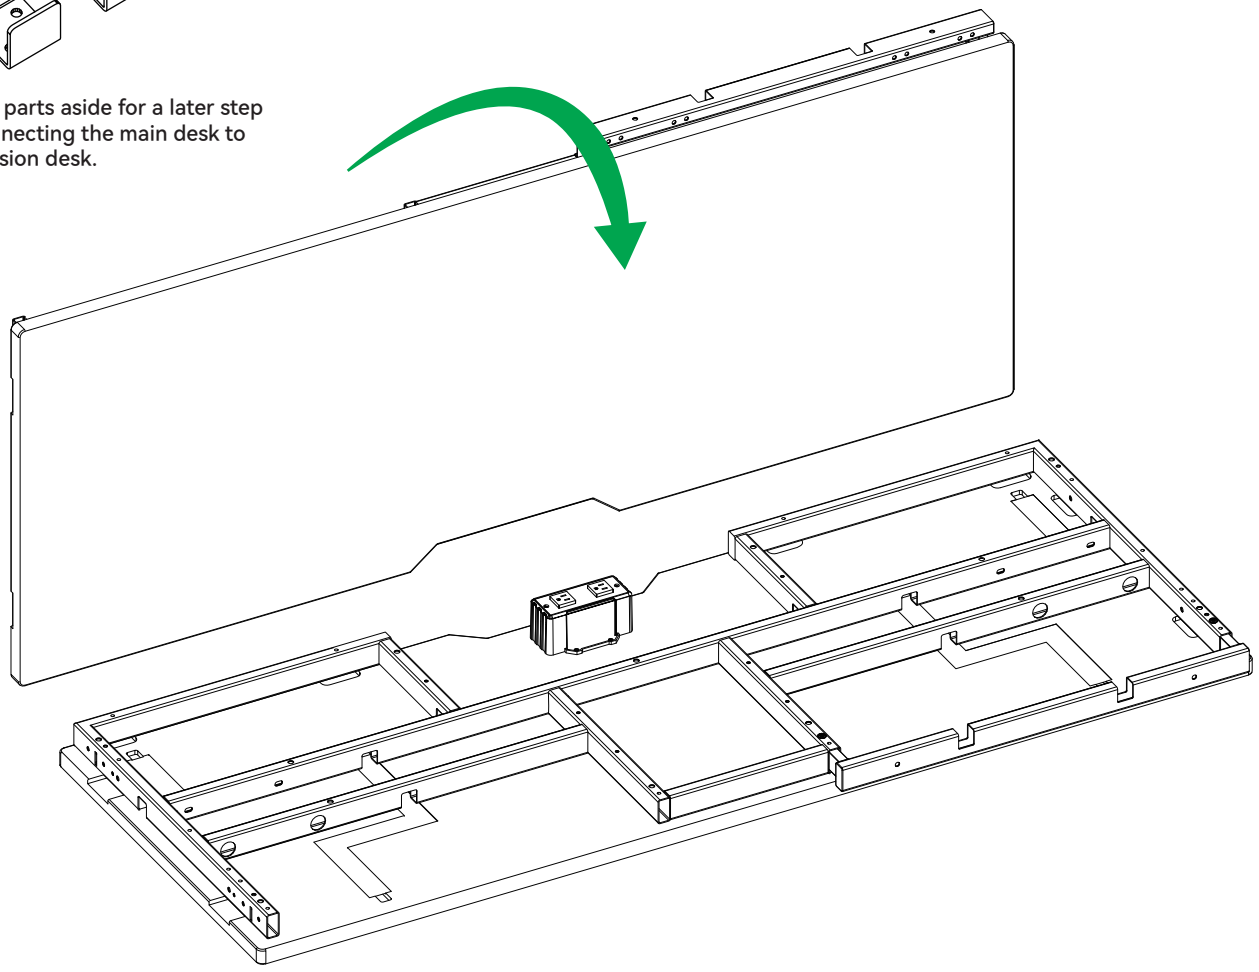



At least two people are required to flip the desktop and place it upside down on a clean, flat surface. To avoid scratches, place the foam and protective packaging underneath the desktop during assembly.



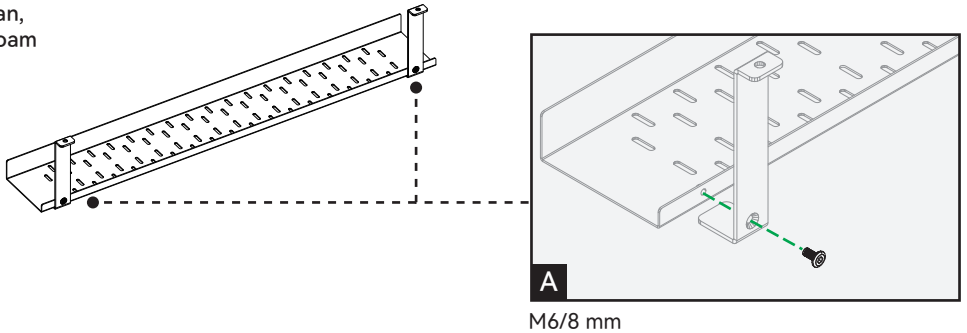

M6/8 mm


Install Left-hand L-shaped Desk

x4 M6/12 mm


x2 M6/55 mm

x1 Allen Key (4 mm)


x2 M6/8 mm

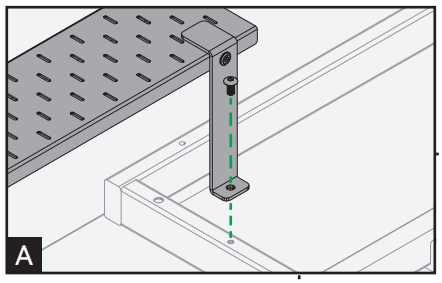


M6/8mm

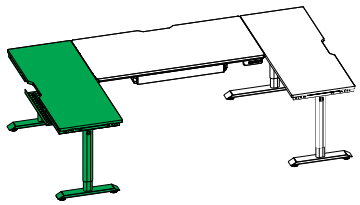


Left-Hand Configuration

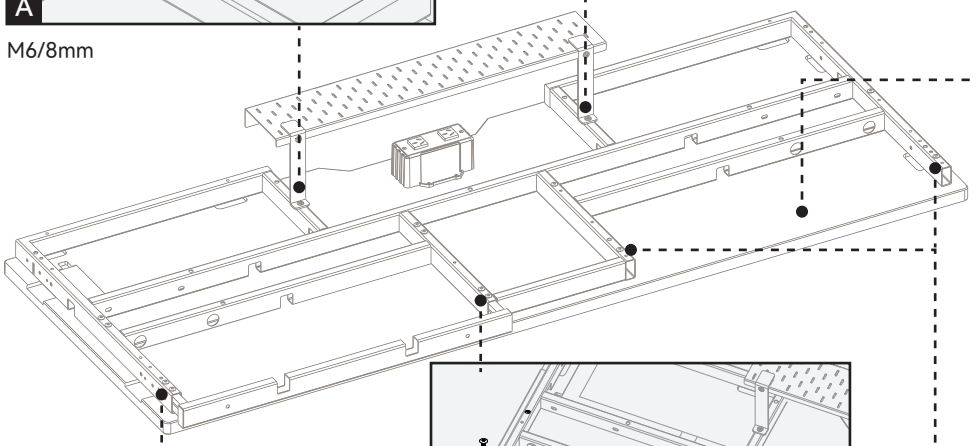

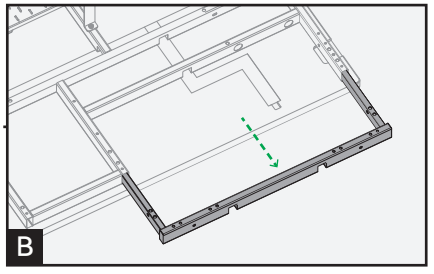


Remove the Extension Connection Bracket

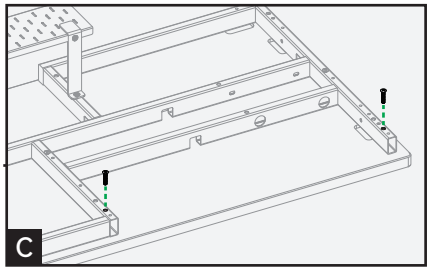


M6/55mm

Secure the frame to the desktop using the M6×55 mm screws through the second mounting holes.

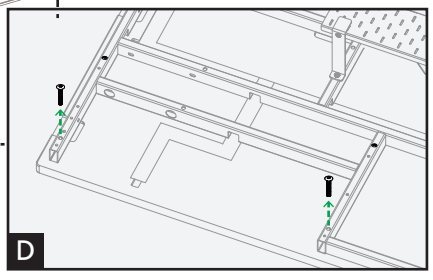

Remove the M6×55 mm screws and keep them for later use.

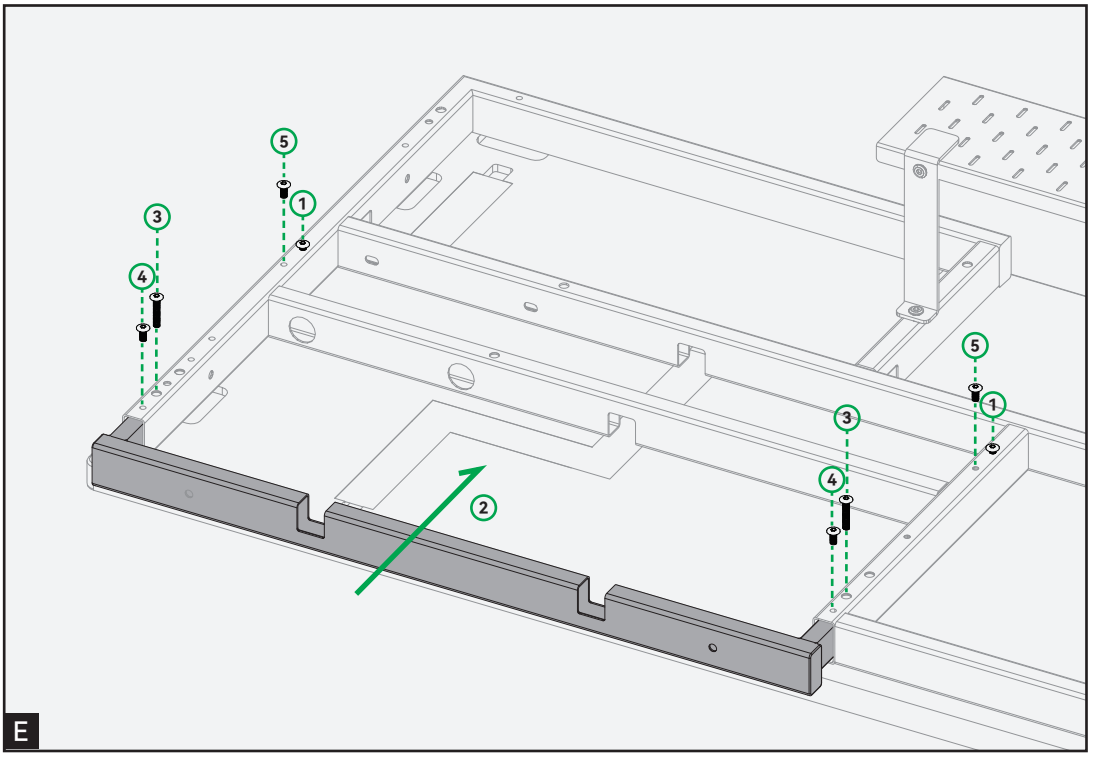


M6/12mm M6/55mm


1. Tighten the pre-installed limit screws on the frame.
2. Slide the Extension Connection Bracket back into the frame until it rests against the limit screws.
3. Insert and tighten the M6×55 mm screws.
4. Install the M6×12 mm screws as limit pins.(Note: Do not fully tighten.)
5. Repeat the same process for the other side to complete the frame positioning.

Note: Ensure all screws are fully tightened.


4 Unpack the Extension Leg




Lifting Column x1




Extension Leg
（Foot）x1




Allen Key
（4 mm）x1



Allen Key
（5 mm）x1





M6/45 mm x5




M6/20 mm x5


5 Install the Extension leg



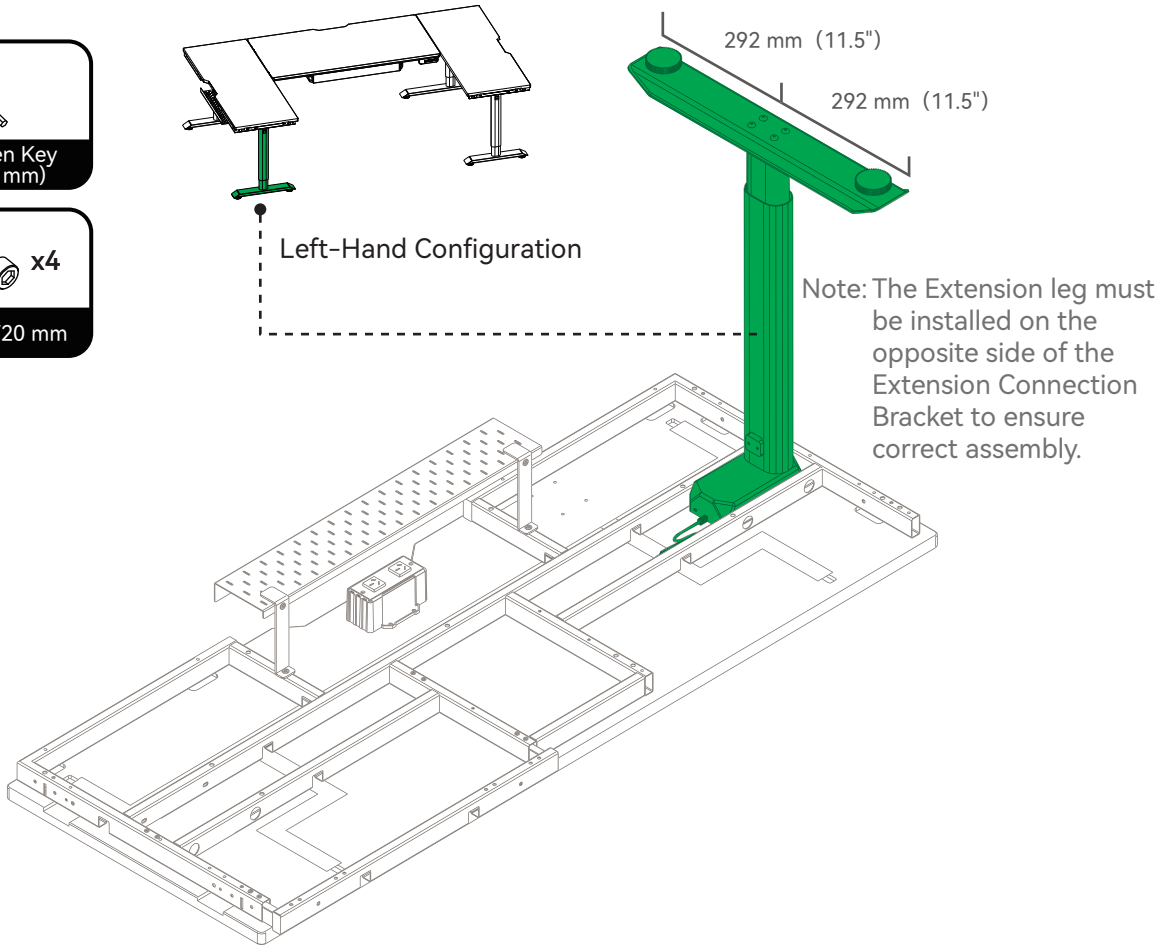


Note: The Extension leg must be installed on the opposite side of the Extension Connection Bracket to ensure correct assembly.

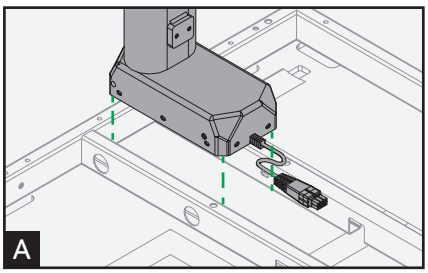

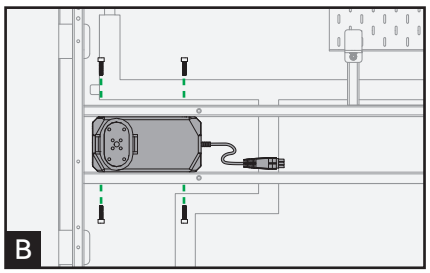


M6/20mm

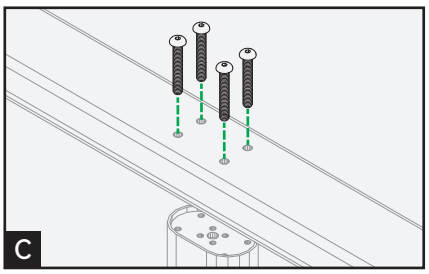


M6/45mm

6 Install the Main Leg on the Left-hand Extension Desktop

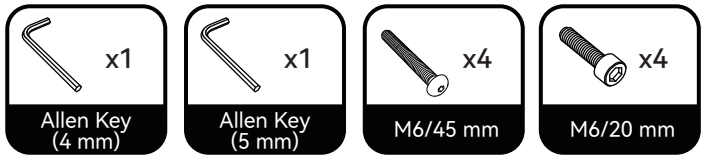




At least two people are required to flip the desk upright.

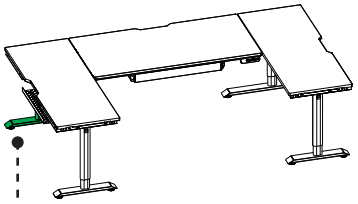



Left-Hand Configuration

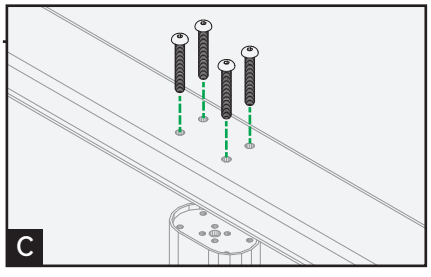


M6/45mm

Note: Incorrect orientation may affect installation. Ensure the longer side of the main foot plate faces the Extension Connection Bracket.

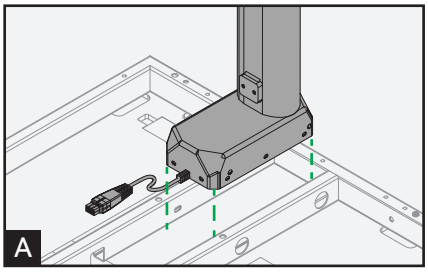


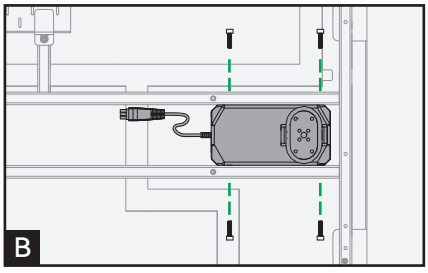


M6/20mm

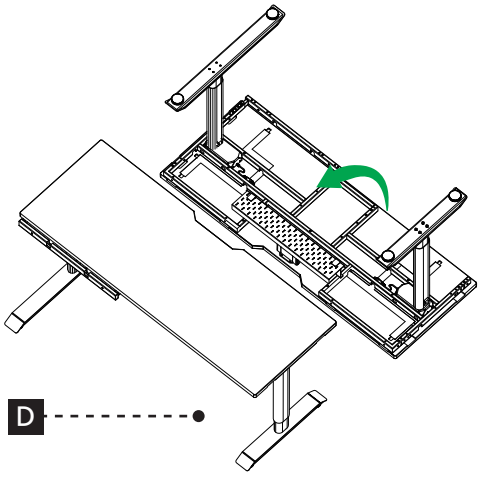


7 Unpack the Extension Desktop

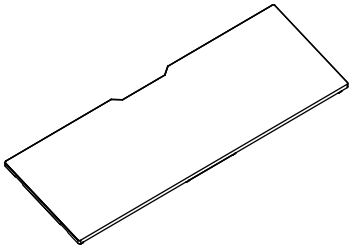


Extension Desktop x1




Extension Connection Bracket x1




Cable Management Tray x1




Tray Brackets x2




Extension Connection Lock x2




Allen Key (4 mm) x1



M6/8 mm x5




M6/12 mm x13



M6/55 mm x3


8 Install the Right-hand Extension Desktop





Set these parts aside for a later step when connecting the main desk to the extension desk.



At least two people are required to flip the desktop and place it upside down on a clean, flat surface. To avoid scratches, place the foam and protective packaging underneath the desktop during assembly.

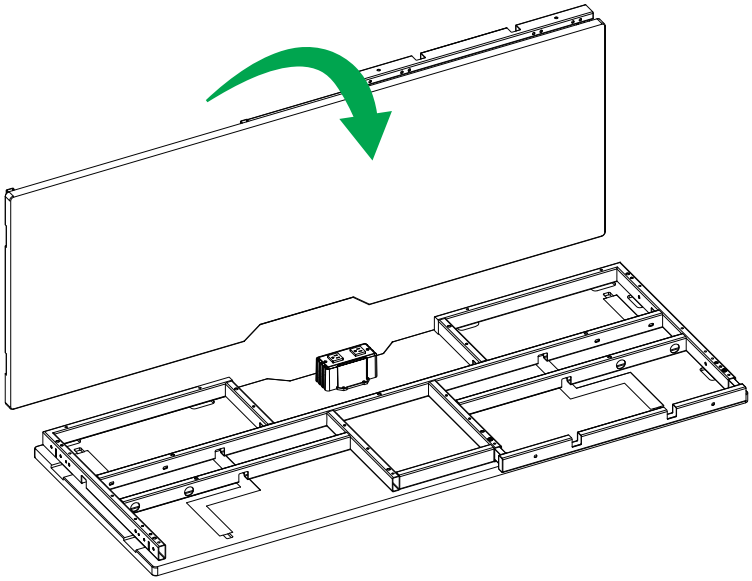




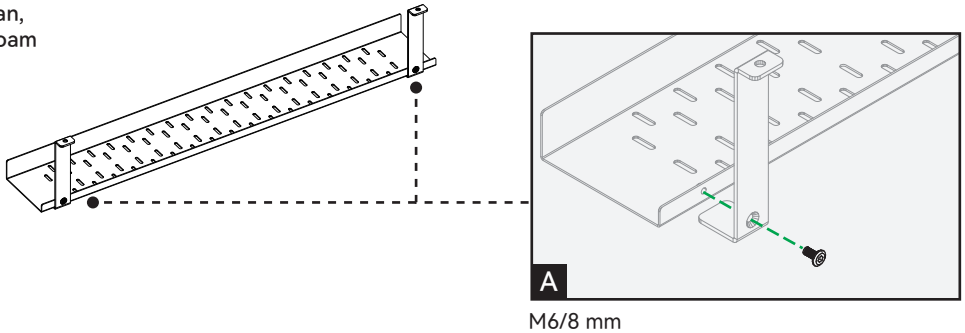


M6/8 mm


Install Right-hand L-shaped Desk

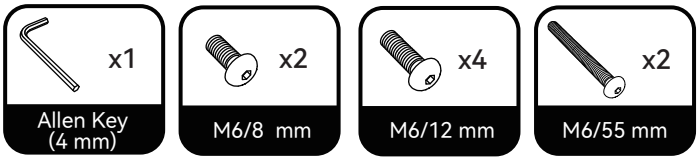


Note:
- Before installation, confirm whether your desk is configured as a left-hand or right-hand L-shape.
- After confirming the orientation, ensure all screws are fully tightened.

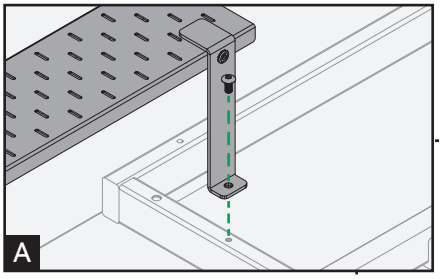

M6/8mm

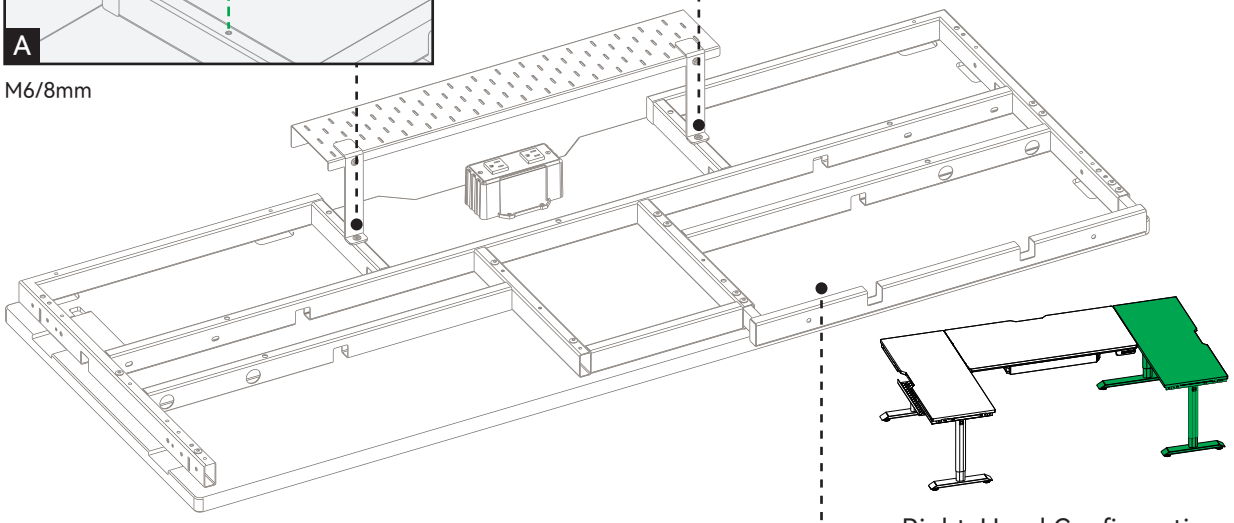

Right-Hand Configuration

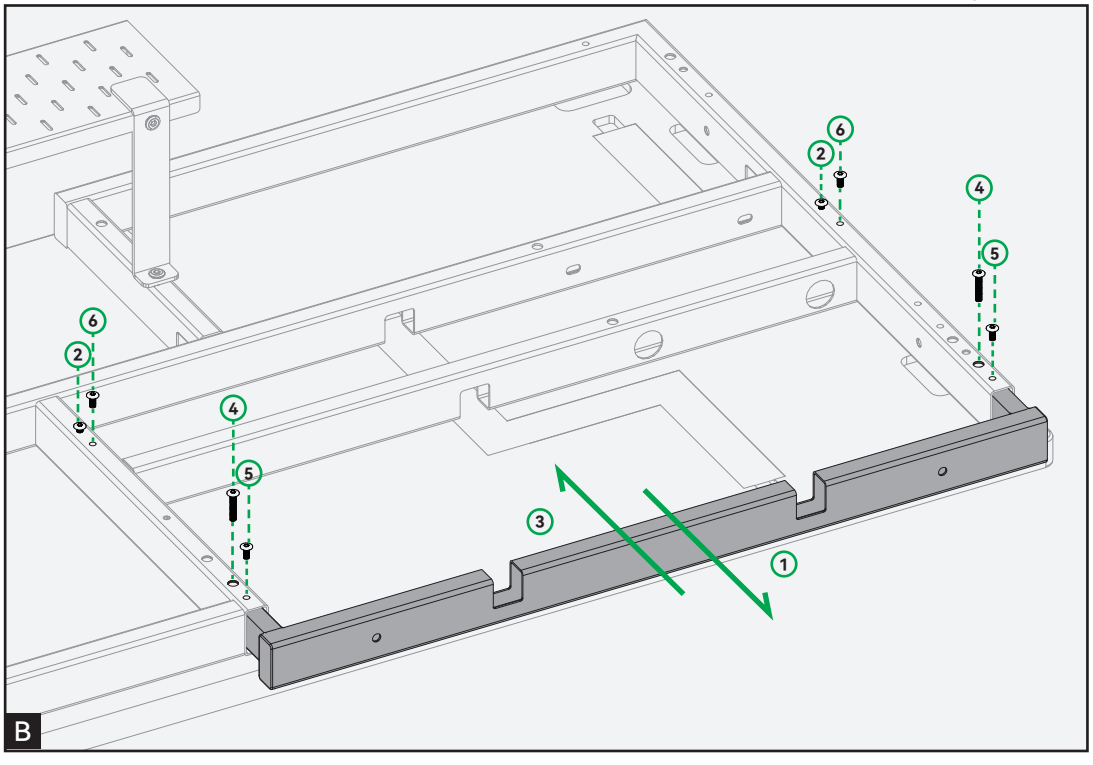


M6/12mm M6/55mm


1. Pull out the Extension Connection Bracket approximately 5 cm outward.
2. Tighten the pre-installed limit screws on the frame.
3. Slide the Extension Connection Bracket back into the frame until it rests against the limit screws.
4. Insert and tighten the M6×55 mm screws
5. Install the M6×12 mm screws as limit pins.(Note: Do not fully tighten.)
6. Repeat the same process for the other side to complete the frame positioning.

Note: Ensure all screws are fully tightened.


9 Unpack the Extension Leg




Lifting Column x1




Extension Leg (Foot) x1




Allen Key (4 mm) x1



Allen Key (5 mm) x1





M6/45 mm x5



M6/20 mm x5


10 Install the Extension leg

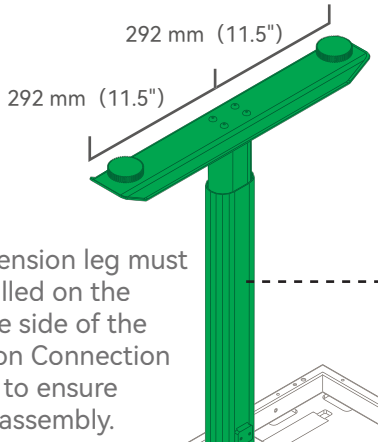


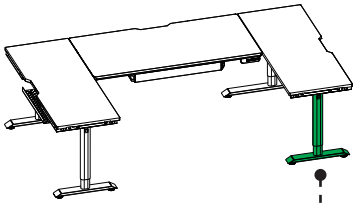


Right-Hand Configuration


Note: The Extension leg must be installed on the opposite side of the Extension Connection Bracket to ensure correct assembly.



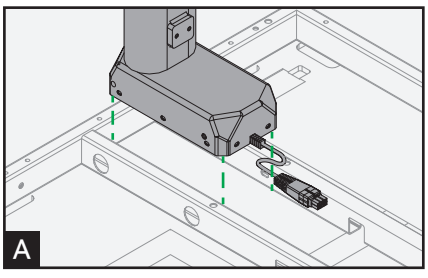

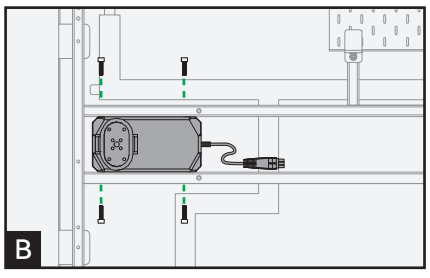


M6/20mm

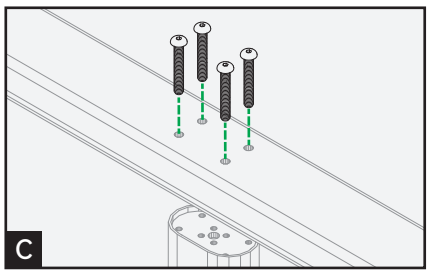


M6/45mm


11 Unpack the Main Legs




Lifting Columns x2




Main Legs
（Feet）x2




Allen Key
（4 mm）x1



Allen Key
（5 mm）x1





M6/45 mm x9




M6/20 mm x9

12 Install the Main Leg on the Right-hand Extension Desktop

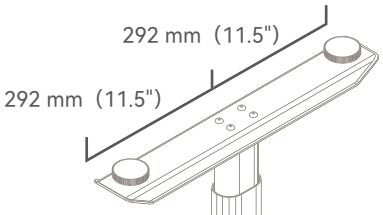


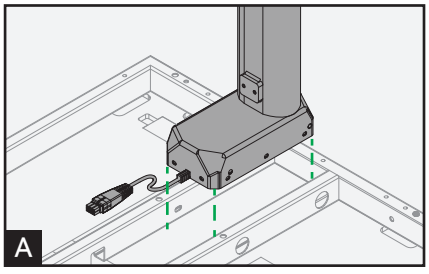


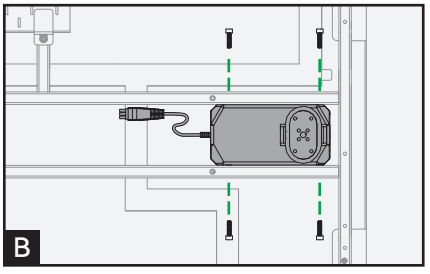

M6/20mm


Note: Incorrect orientation may affect installation.
Ensure the longer side of the main foot plate faces the Extension Connection Bracket.

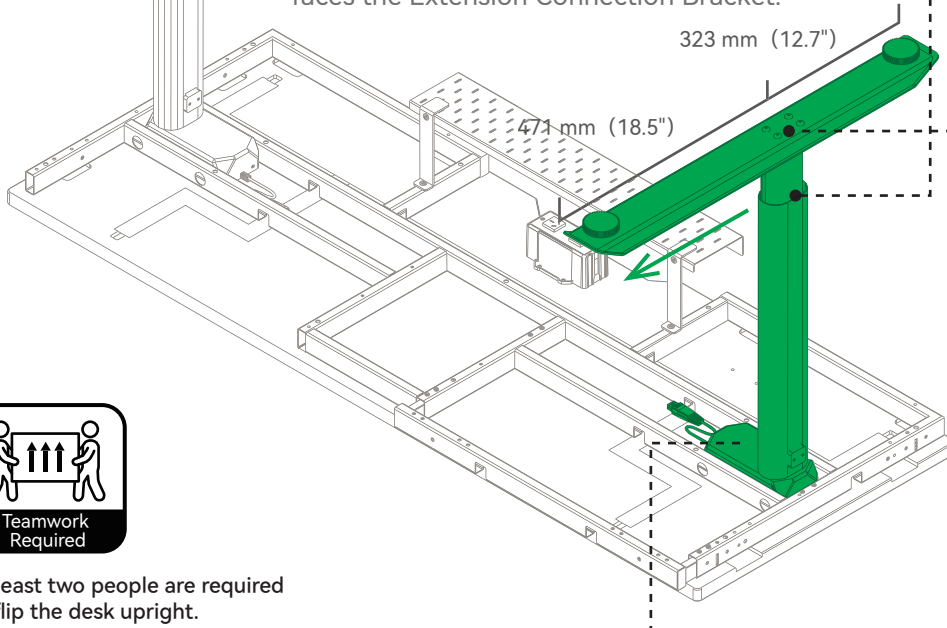


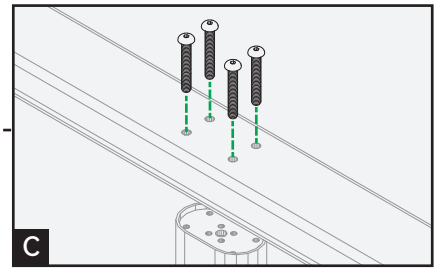


M6/45mm

At least two people are required to flip the desk upright.




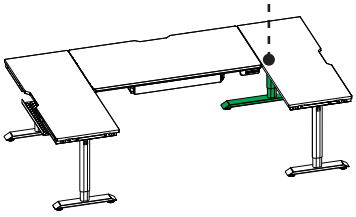


Right-Hand Configuration

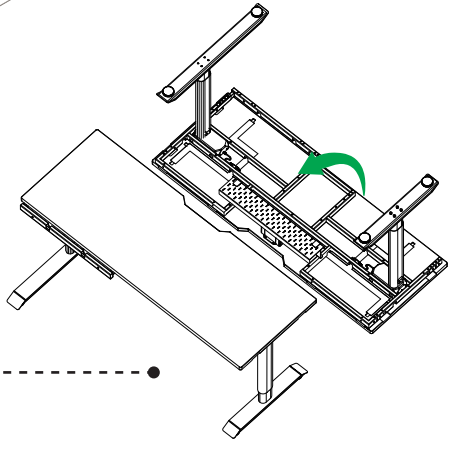


13 Unpack the Main Desktop

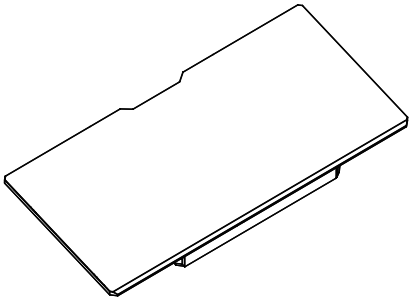


Main Desktop x1

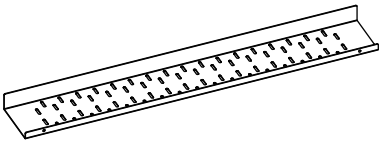


Cable Management Tray x1



Tray Brackets x2



Control Panel x1




Allen Key
(4 mm) x1



Phillips
Self-tapping Screw x1




Phillips
Screwdriver x1



Cable Management
Clips x10


14 Install the Main Desktop

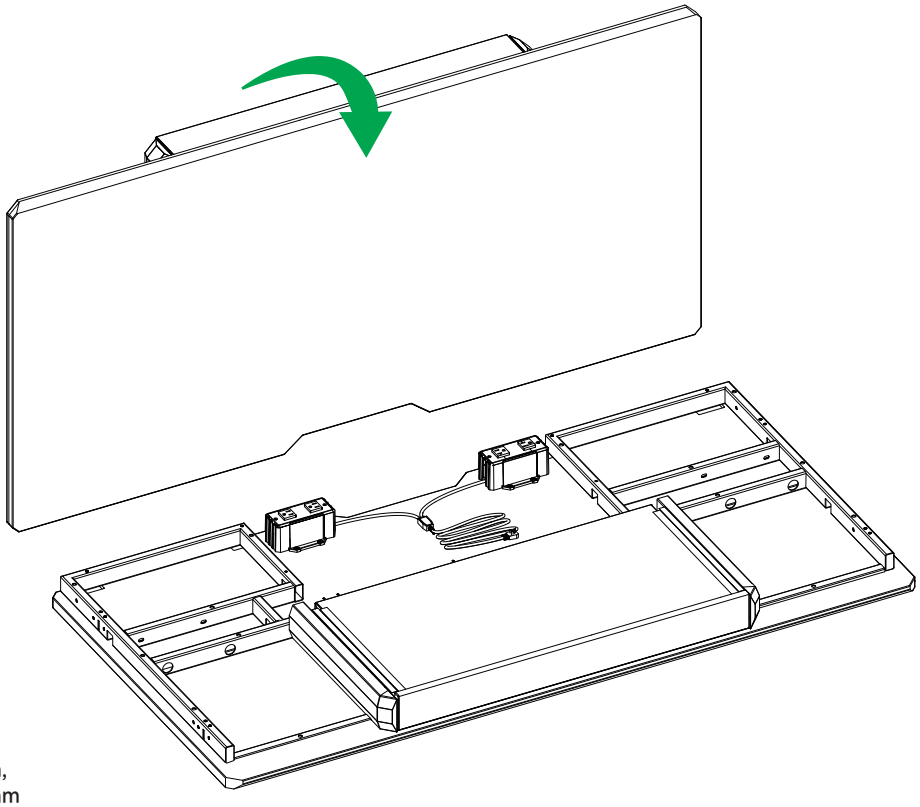




At least two people are required to flip the desktop and place it upside down on a clean, flat surface. To avoid scratches, place the foam and protective packaging underneath the desktop during assembly.


15 Unpack the Master Controller



Master Controller (N4) x1




Allen Key (4 mm) x1




M6/16 mm x3



Leg Connection Cable 140 cm（55"）x2





Leg Connection Cable 260 cm（102"）x3




Master Controller Power Cable x1


16 Install the Master Controller





This is a spare cable.
Keep it for future use.

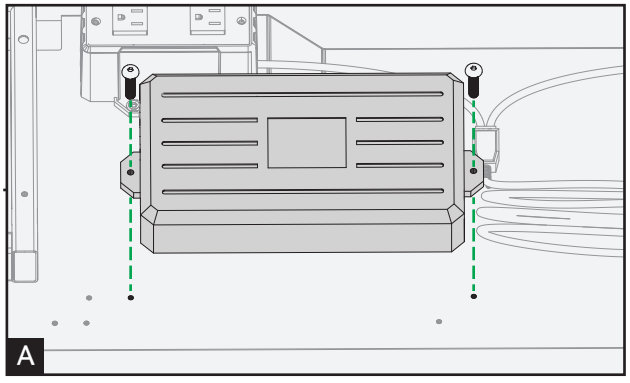




Power Port


Note: Ensure the Master Controller power port is facing to the right.


17 Install the Cable Management Tray and Control Panel

Note: Do not overtighten the screws.

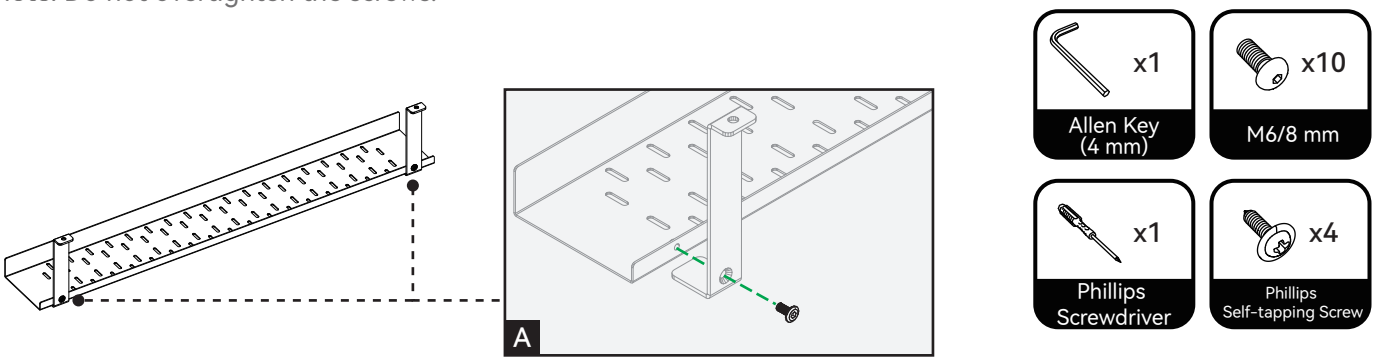


M6/8 mm

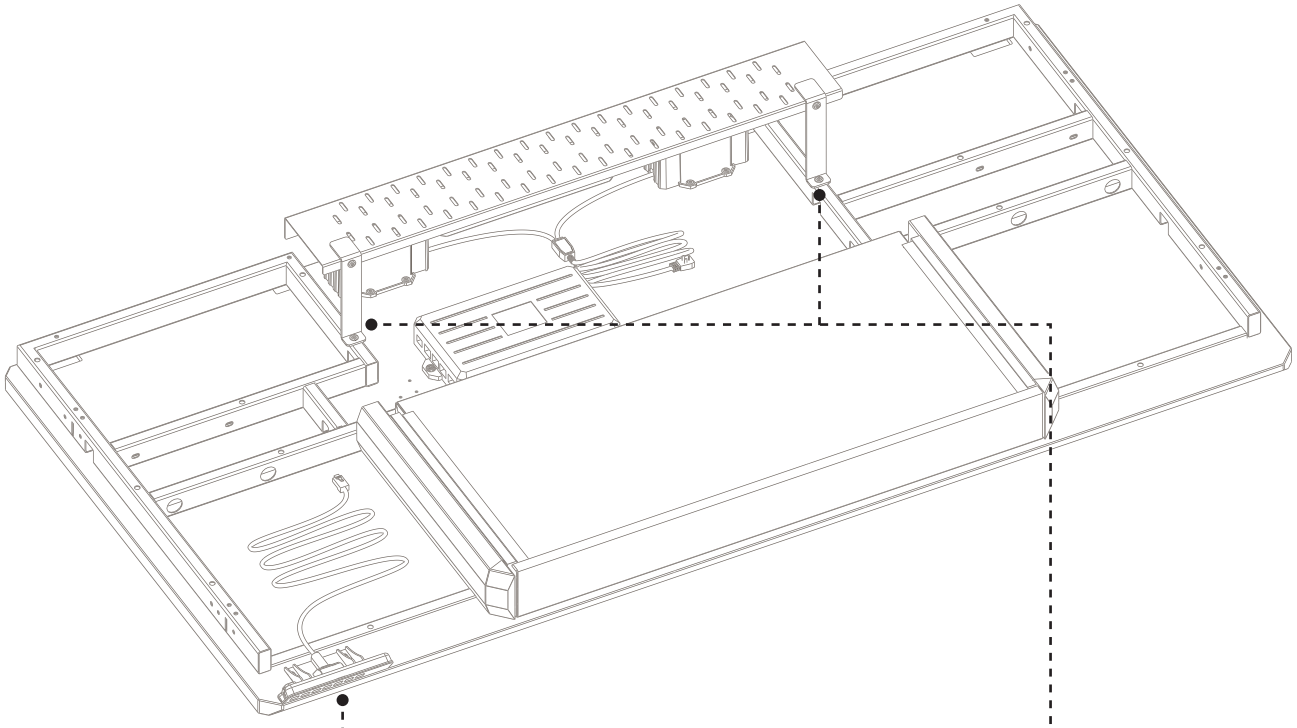

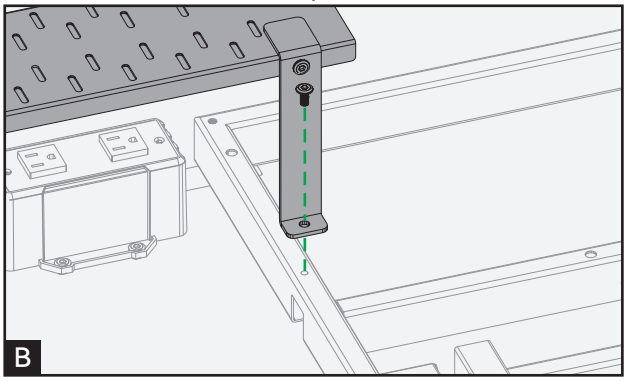

M6/8 mm

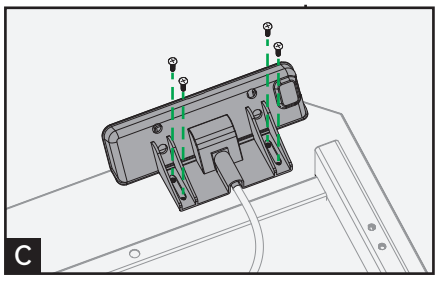


Phillips Self-tapping Screw

18 Connect the Main Desktop to Both Extension Desks








At least two people are required to lift the main desktop and carefully lower it onto the extension brackets on both sides.

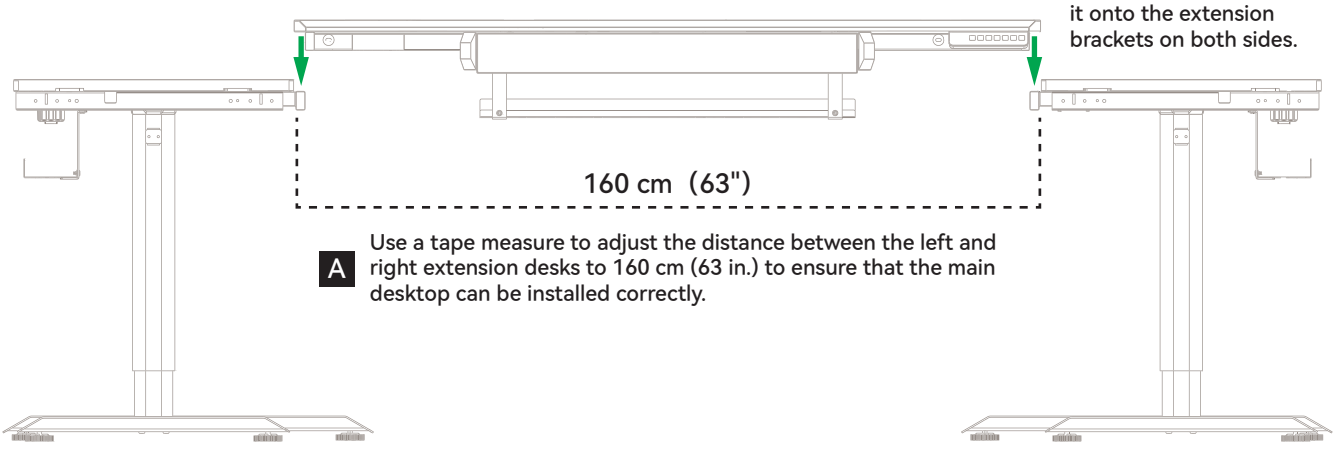

A Use a tape measure to adjust the distance between the left and right extension desks to 160 cm (63 in.) to ensure that the main desktop can be installed correctly.

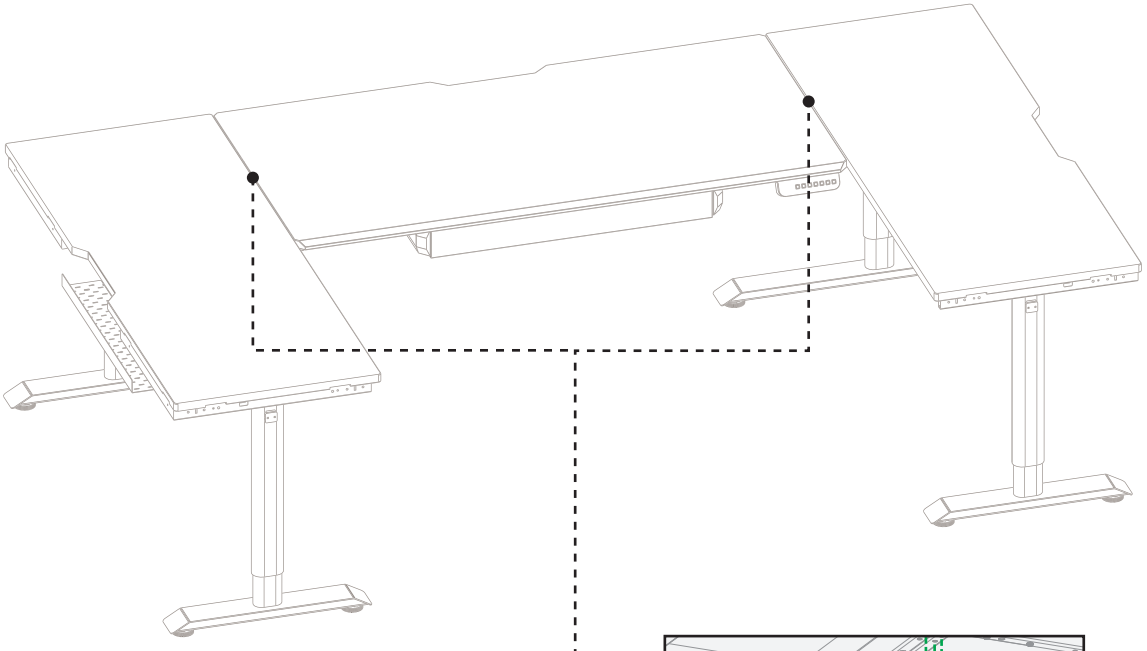

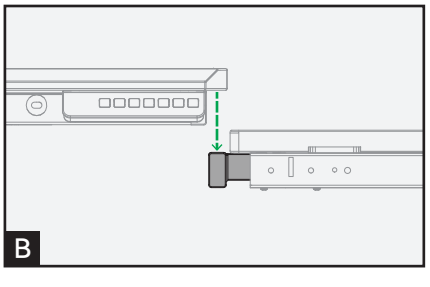


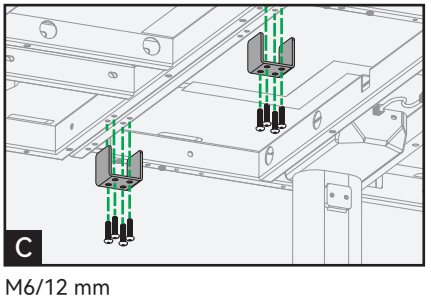



M6/12 mm

19 Wiring and Cable Management


Note: Before powering on the desk, verify that all extension desk power cables and the master controller power cable are connected correctly.

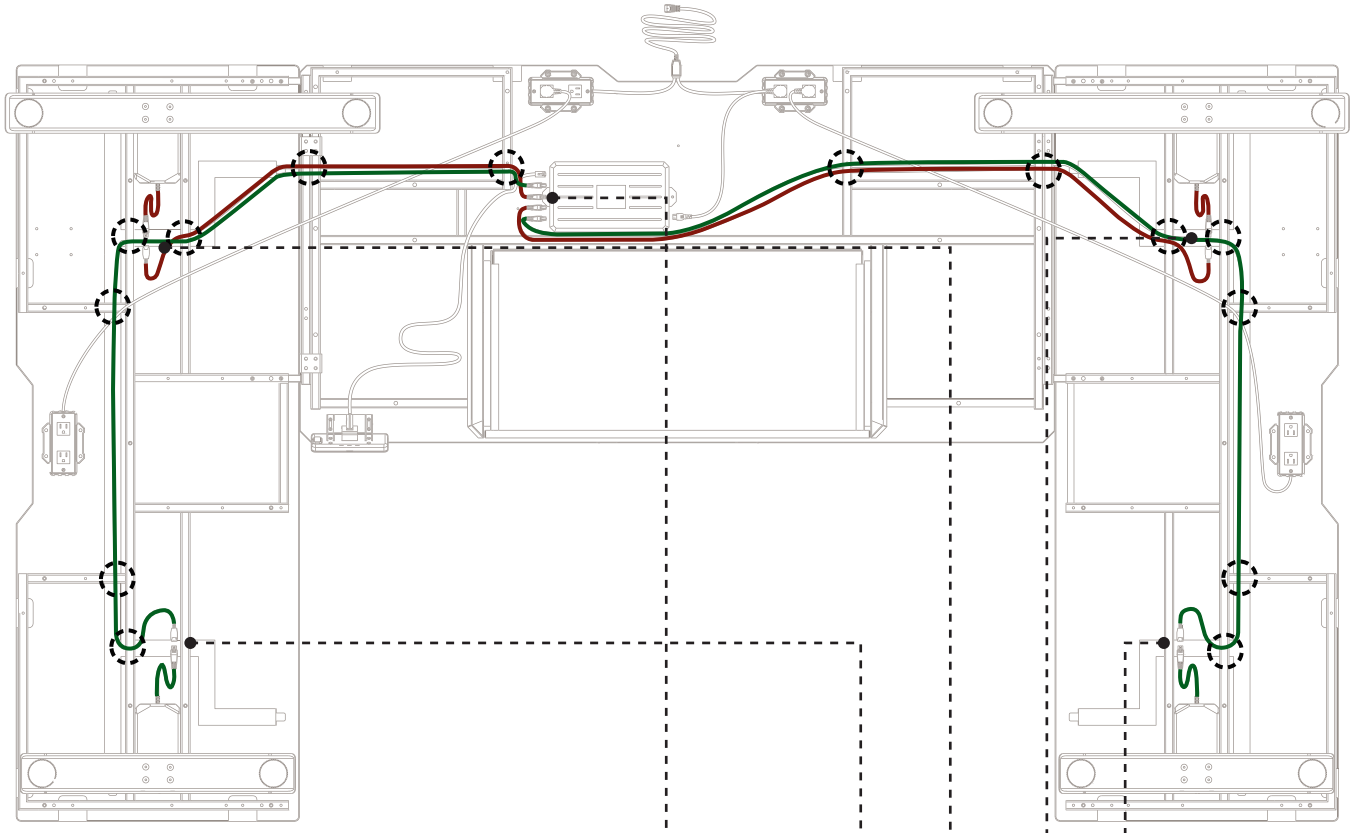

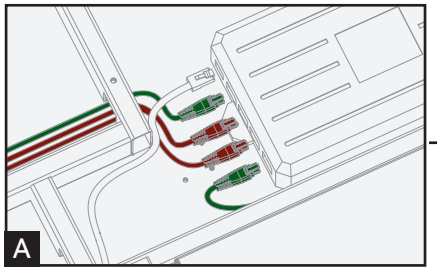

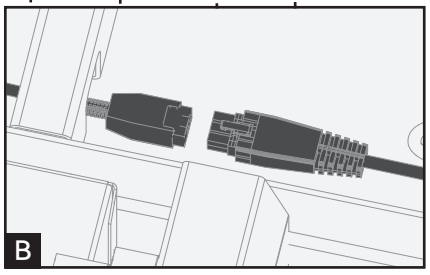


— Leg Connection Cable 140 cm (55")
— Leg Connection Cable 260 cm (102")


Cable Clips


Use the cable clips to secure and tidy loose cables.




Leg Connection Cable 140 cm (55")



Leg Connection Cable 260 cm (102")

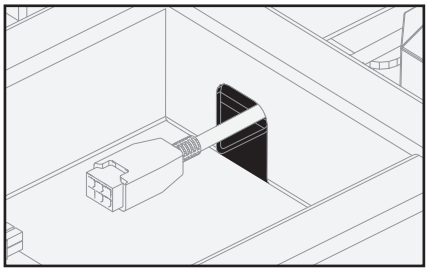


Route the leg cables through the frame's pre-drilled holes to the master controller.

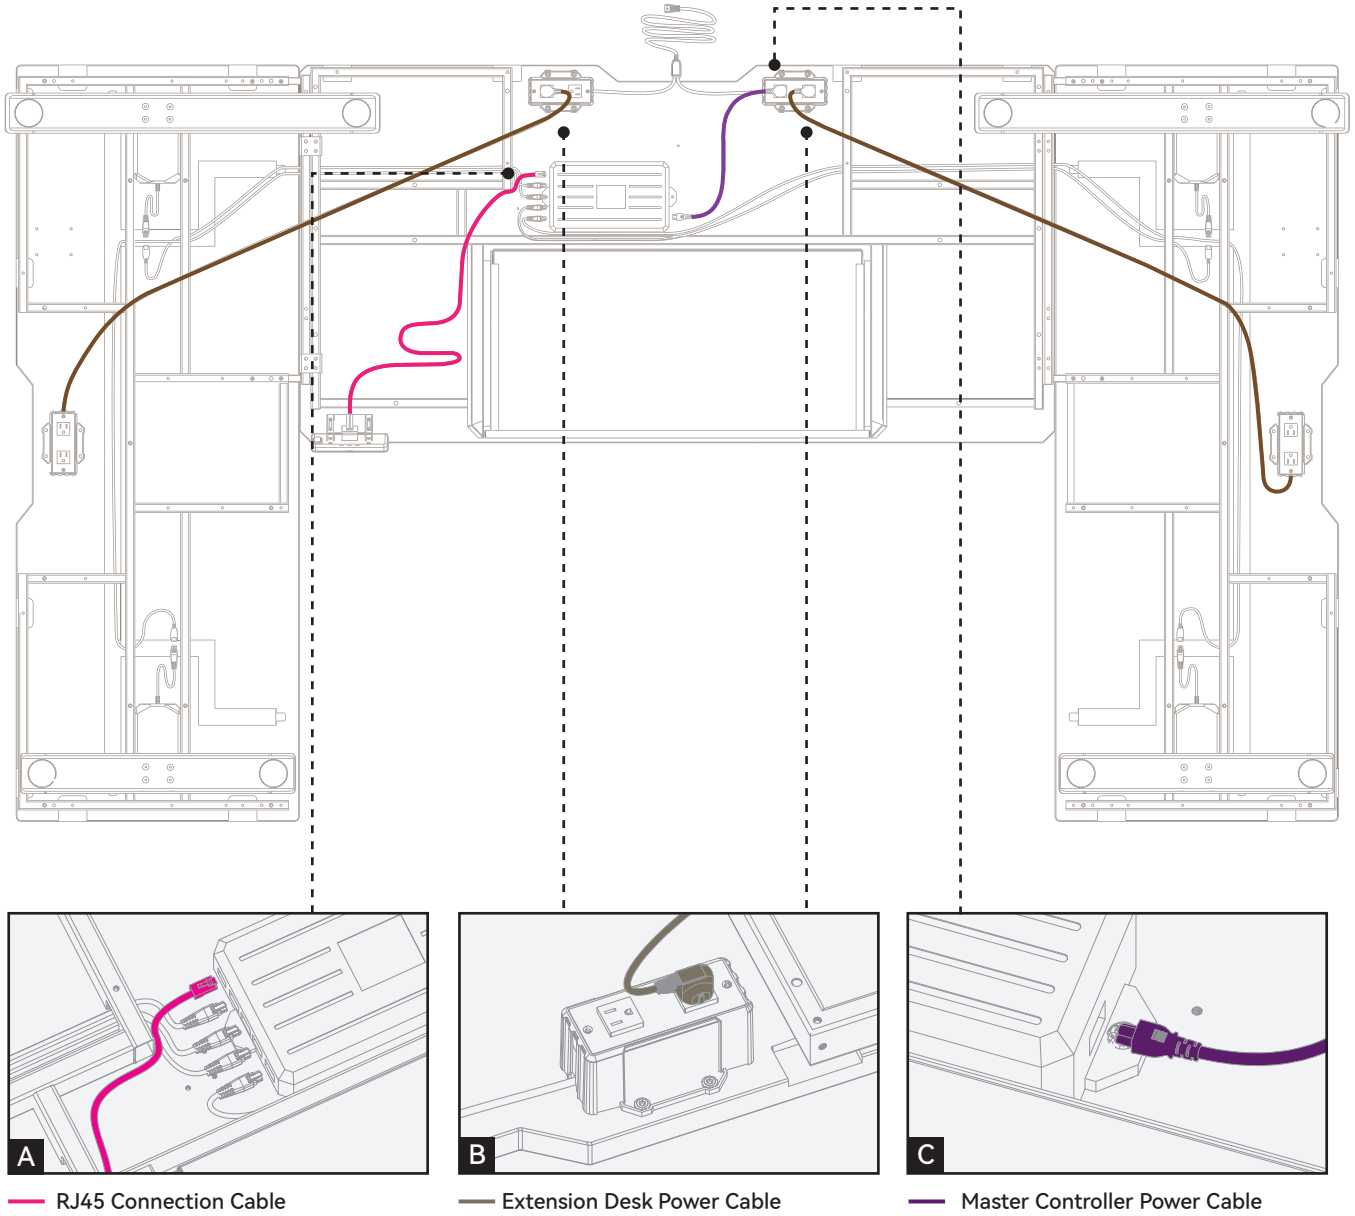

RJ45 Connection Cable

Extension Desk Power Cable

Master Controller Power Cable



Anti-Pinch and Anti-Collision:

- Follow the installation steps in this manual strictly.
- All screws and bolts must be fully tightened.
- Original factory connectors must be used for all multi-module configurations.
- Do not modify the structure or drill additional holes without authorization.

Maintenance and Care:

- Inspect all screws and structural connections regularly.
- Disconnect the power before cleaning.
- Do not use strongly corrosive cleaning agents.
- If abnormal noise or vibration occurs, stop using the desk immediately.

Environmental Requirements:



The recommended operating temperature is 0°C to 40°C.



Avoid prolonged exposure to direct sunlight.



The floor surface must be level.



Do not use the desk in flammable or explosive environments.

- Scan to watch the installation video: **livtab.com/product-guide.**

LIVTAB

www.livtab.com